
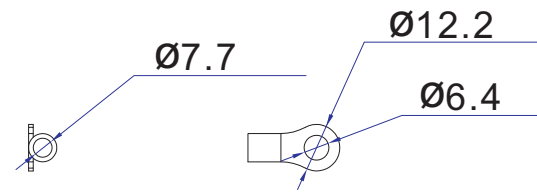



VIEW A

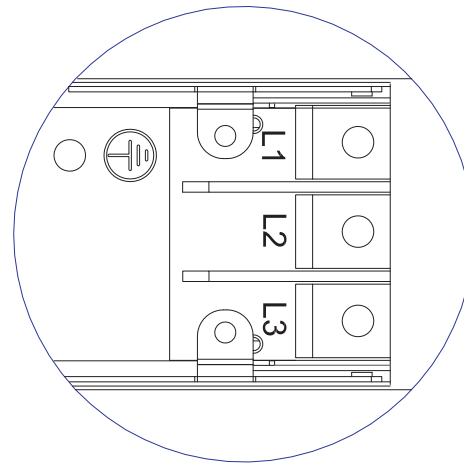



1. KST RNBS 22-6 or equivalent terminals for 4 AWG wire

2. Inside diameter 6.4mm & Outside diameter 12.2mm terminal ring for M6 screw



VIEW C

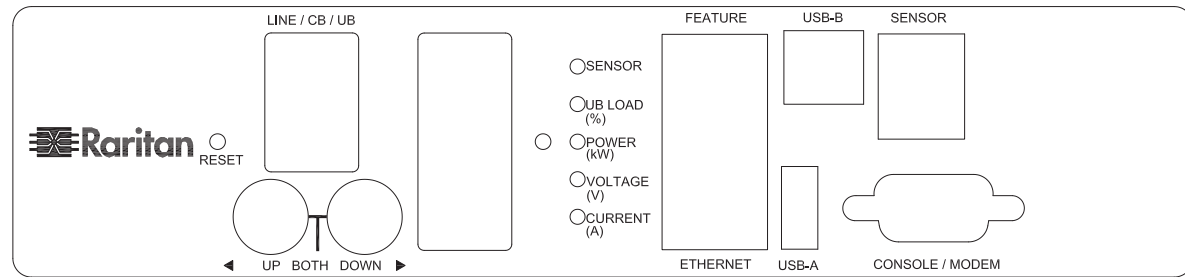

VIEW B

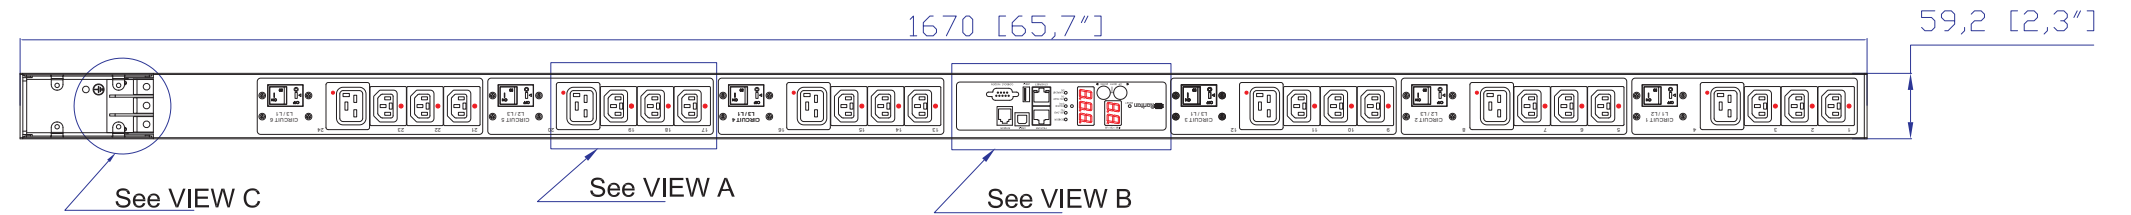

Knockout size (opening): 1.375" for Ø1" flexible steel conduit cable and fitting

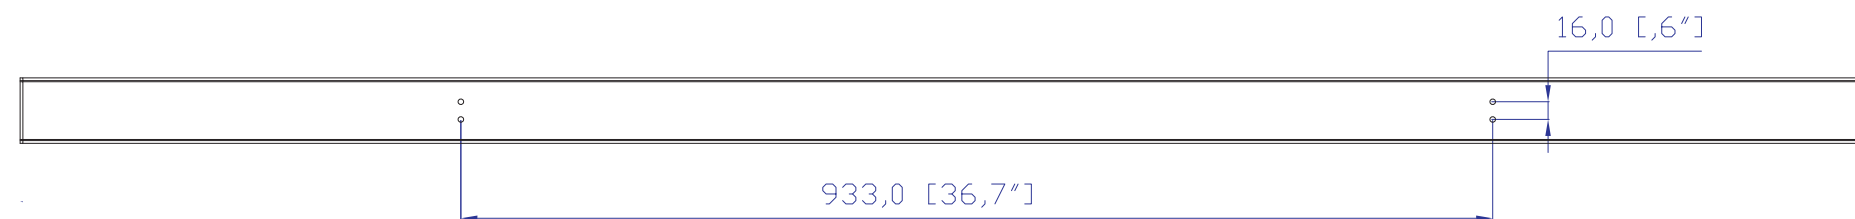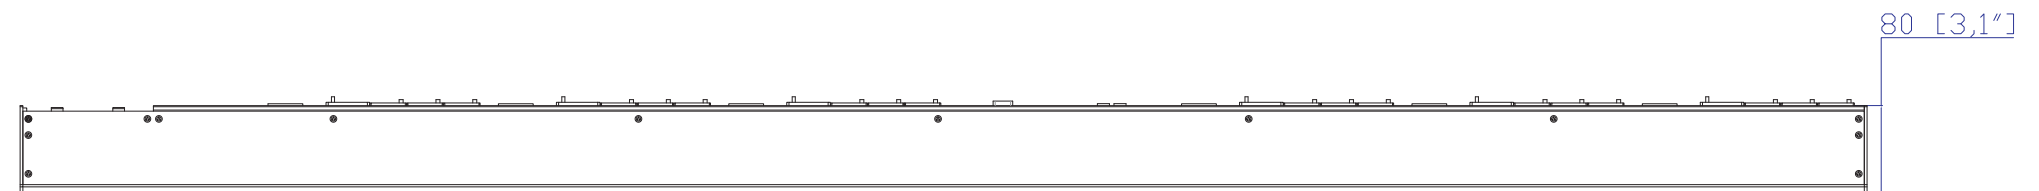

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



PROJECTION THIRD ANGLE
DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE: iPDU Zero U,
Three phase 48A / 208V-240V
Plug Type: 48A Terminal 3P
Outlet Type: (18) Locking IEC320 C13
(6) Locking IEC320 C19

DRAWN : Eva Lin Nov. 26. 2013
ENGINEER: Siang Hung Nov. 26. 2013
APPROVED: Tom Hsueh Nov. 26. 2013

DWG NO. MPX2-1529YV-E2N1V2
REV. A