

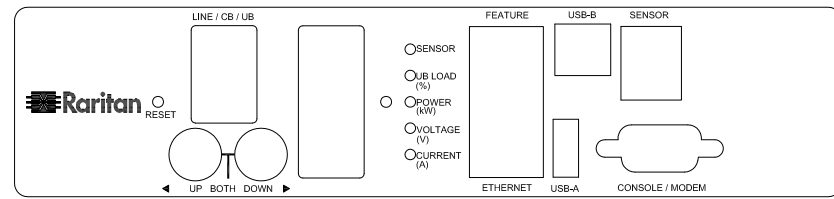


VIEW A

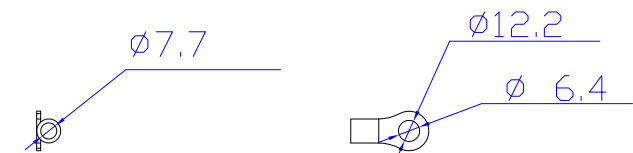


VIEW B

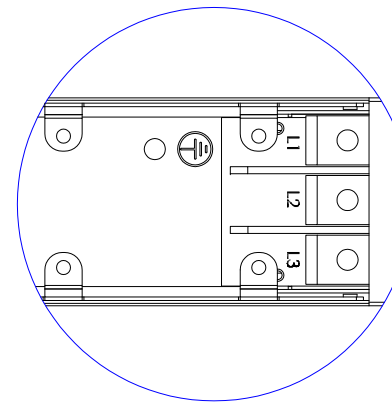

1. KST RNBS 22-6 or equivalent terminals for 4 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 12.2 mm ring for M6 screw


VIEW C

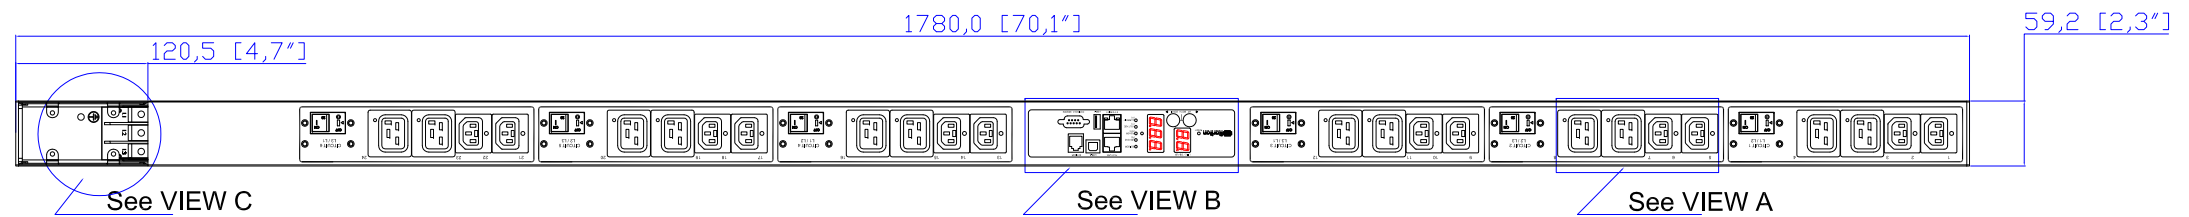


See VIEW C

See VIEW B

See VIEW A



Knockout size (opening): 1.375" for Ø1" flexible steel conduit cable and fitting

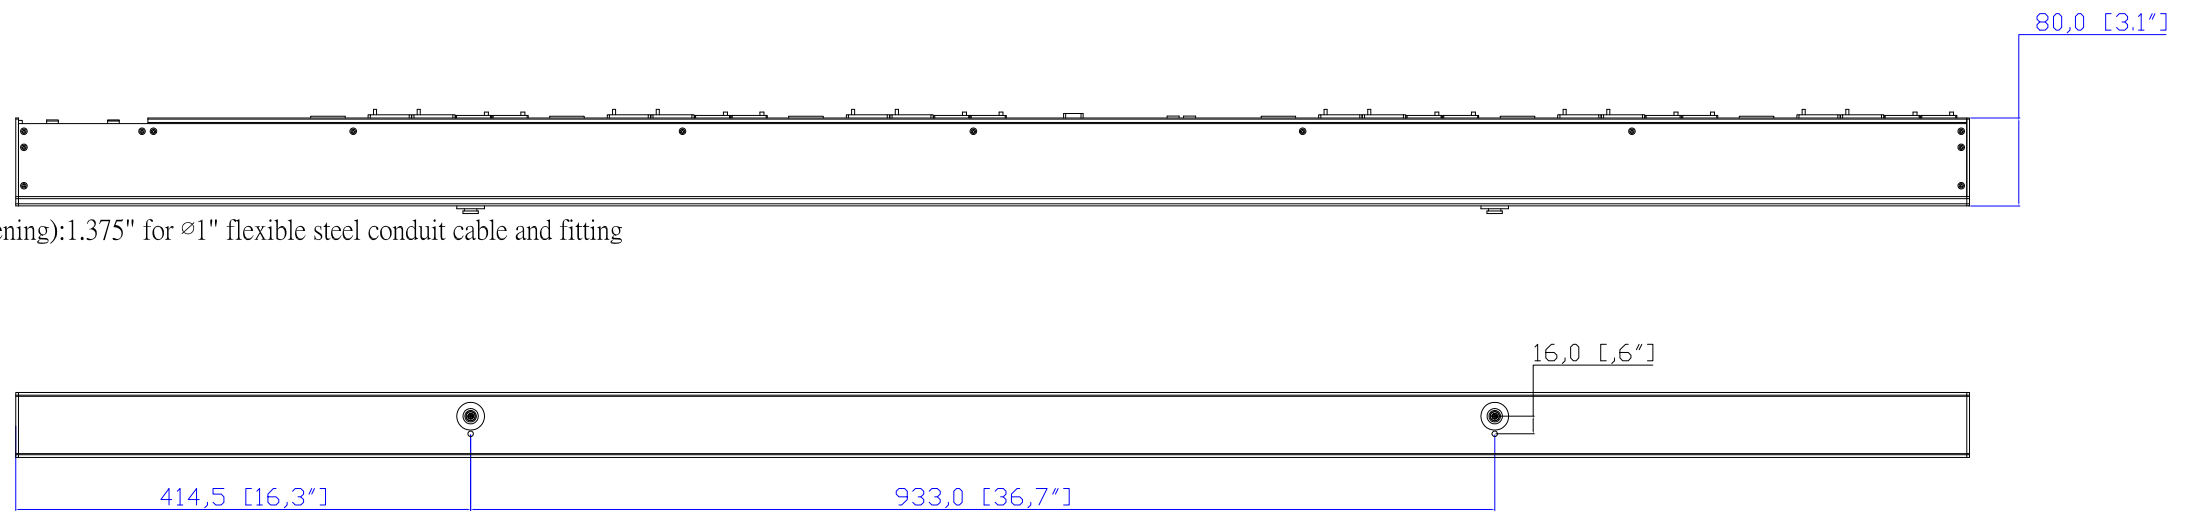

NOTES:  
1.ALL DIMENSIONS ARE MILLIMETERS[INCHES].



DRAWN :	EVA LIN	JAN. 03,2014
ENGINEER:	Siang_H	JAN. 03,2014
APPROVED:	Tom_H	JAN. 03,2014

PROJECTION THIRD ANGLE  
DO NOT SCALE DRAWING  
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE..

TITLE: iPDU Zero U Three Phase, 48A/208V-240V Plug Type: 48A Terminal 3P Outlet Type: (12)Locking C13,(12)Locking C19	DWG NO. <b>MPX2-1551YV-E2V2</b>	REV. <b>A</b>
---	------------------------------------	------------------