

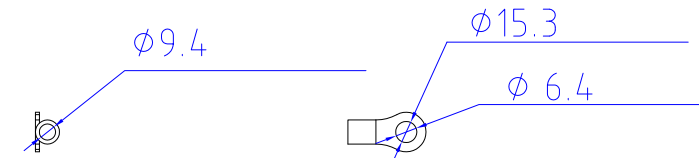


VIEW A


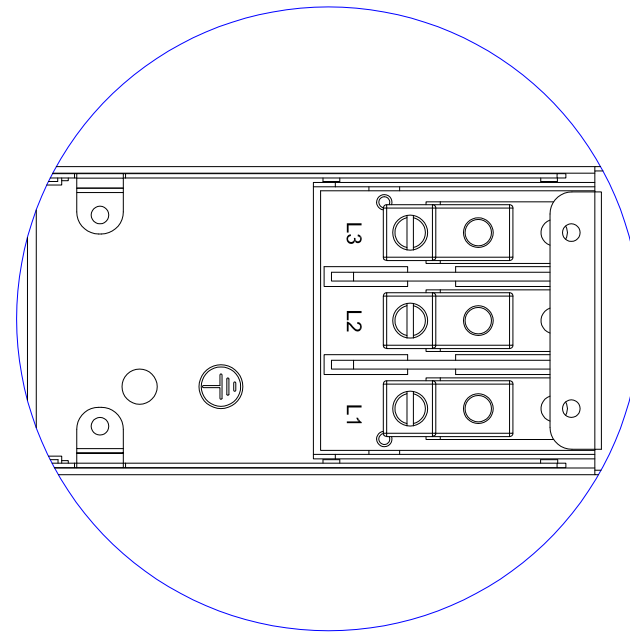


1. KST RNBS 38-6 or equivalent terminals for 2 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 15.3 mm ring for M8 screw


VIEW C

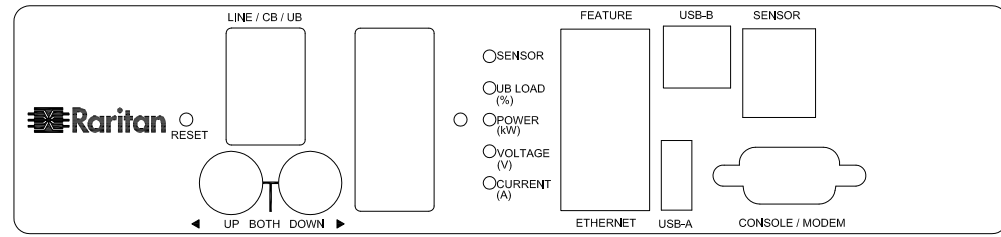

VIEW B

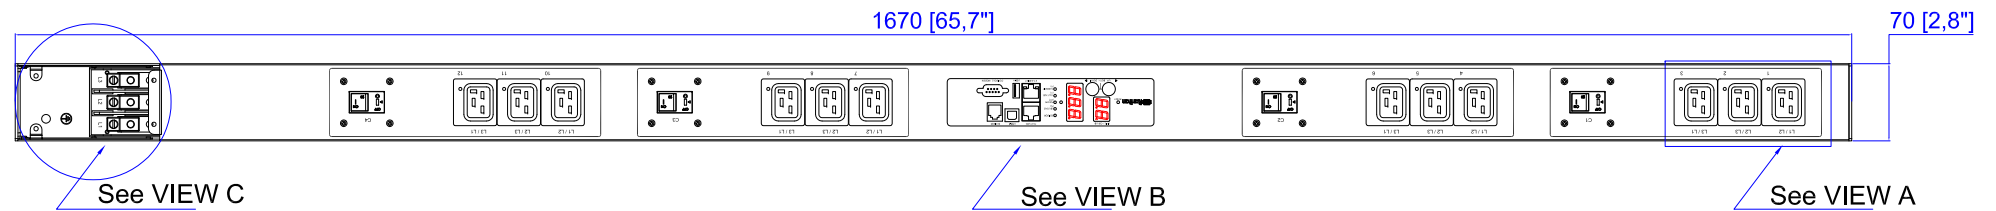

Knockout size (opening): 1.375" for \varnothing 1" flexible steel conduit cable and fitting

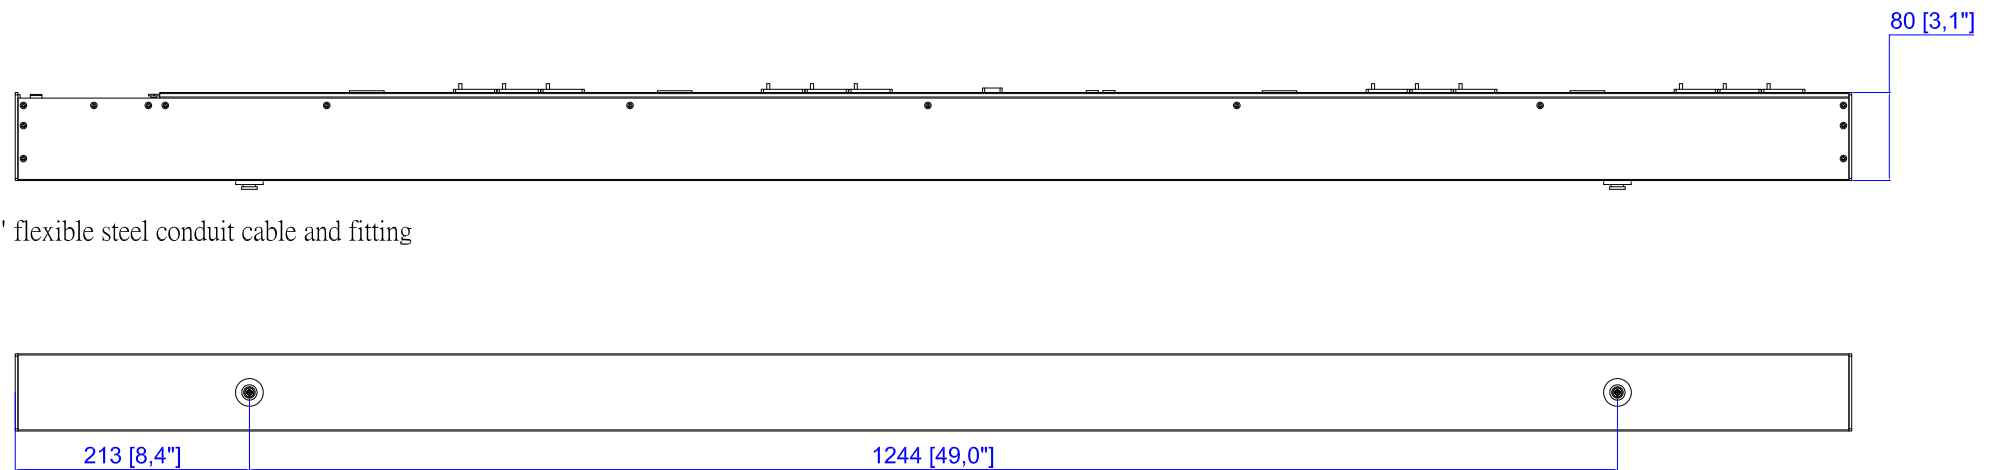

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



DRAWN : EVA LIN Apr.30, 2014
ENGINEER: Siang_H Apr.30, 2014
APPROVED: Tom_H Apr.30, 2014



DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE: iPDU Zero U,
Three Phase, 80A/208V-240V,
Plug Type: 80A Terminal 3PY
Outlet Type: (12) Locking C19

DWG NO. **MPX2-1935YV-E2F7N1V2D3** REV. **A**