



1. KST RNBS 5-5 or equivalent terminals for 10-12 AWG Wire
2. Inside diameter 5.3 mm & Outside diameter 8.8mm ring for M5 screw

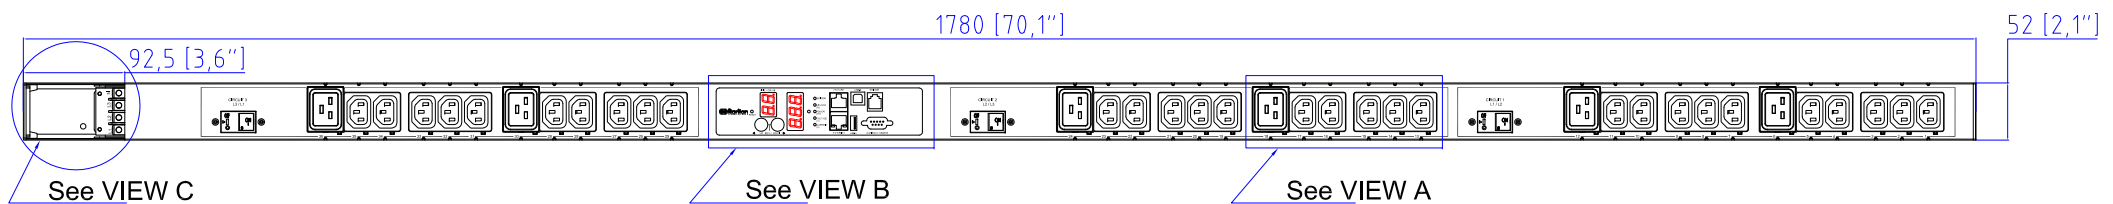

Knockout size (opening): 1.109" for ϕ 3/4" flexible steel conduit cable and fitting

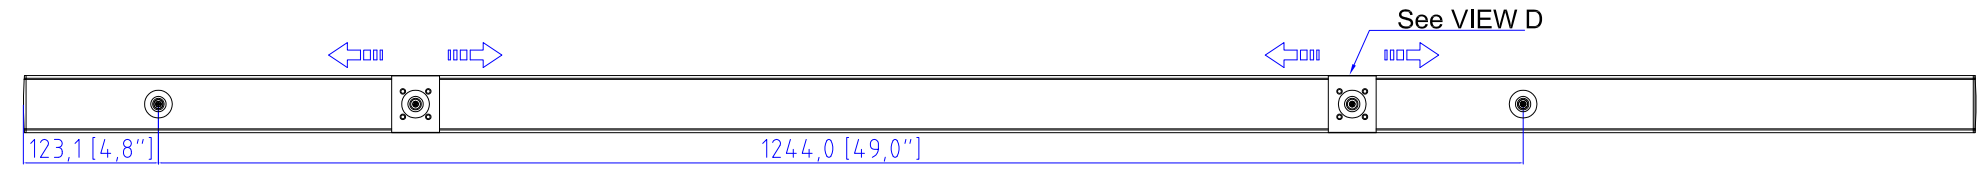

- NOTES:
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
 4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURE. BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
 5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
 6. LENGTH OF THE CORD IS 3000MM +/- 70MM
 7. DIMENSION TOLERANCE: LENGTH +/- 3MM, WIDTH +/- 1MM, DEPTH +/- 0.5MM

 www.raritan.com	
Drawing Maker:	EVA LIN Aug. 22, 2016
Design Engineer:	Kenny_C Aug. 22, 2016
Approver:	Tom_H Aug. 22, 2016

PROJECTION THIRD ANGLE	DO NOT SCALE DRAWING SHEET 1 OF 1
THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE..	

TITLE: iPDU Zero U Three Phase, 24A/190-208V Plug Type: 24A Terminal 3P Outlet Type:(30)IEC230 C13,(6)IEC230 C19	DWG NO. MPX2-2721YU	REV. 0B
------------------------------------------------------------------------------------------------------------------------------	-------------------------------	-------------------