

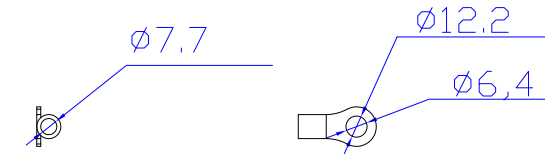
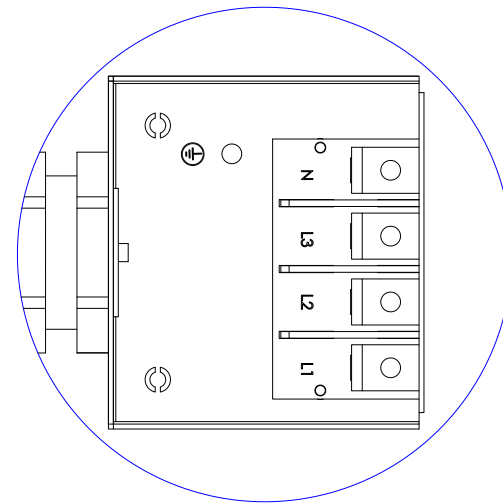

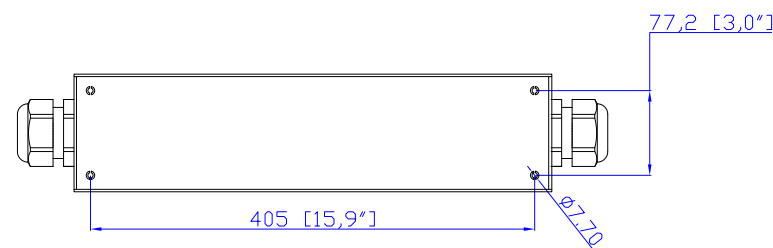


VIEW A

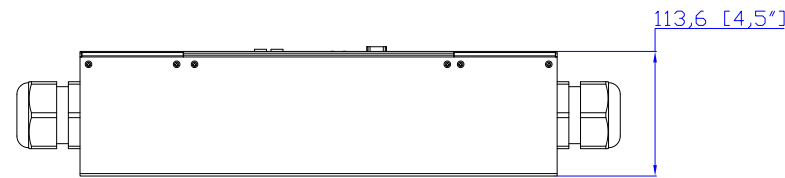

1. KST RNBS 22-6 or equivalent terminals for 4 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 12.2mm ring for M6 screw

VIEW B

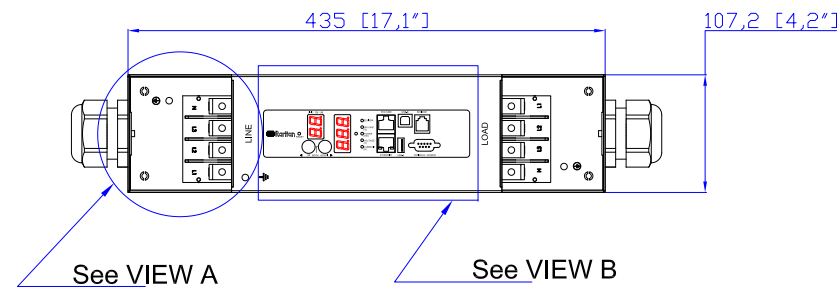

M50 Cable Gland
Assembly Wire Range: 24~35mm

NOTES:
1.ALL DIMENSIONS ARE MILLIMETERS[INCHES].

		PROJECTION THIRD ANGLE	DO NOT SCALE DRAWING	TITLE: iPDU Zero U, Three phase 63A / 360V-415V Max Current:63A 3Φ-Y Input Plugs:(1)63A Terminal 3PY Output Plugs:(1)63A Terminal 3PY
			SHEET 1 OF 1	
DRAWN : EVA LIN	Spe.01,2011	THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.	DWG NO. MPX2-3180	REV. A
ENGINEER: Sam_L	Spe.01,2011			
APPROVED: Tom_H	Spe.02,2011			