


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### LINE DRAWING

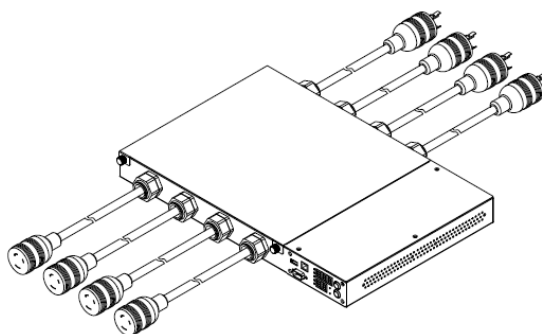

### FEATURES

|                                     |                                                                                           |
|-------------------------------------|-------------------------------------------------------------------------------------------|
| Energy Metering                     | Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor |
| Metering Accuracy                   | ISO/IEC 62053-21 1%                                                                       |
| Metering per Input Line             | Yes                                                                                       |
| Metering per Branch Circuit Breaker | No                                                                                        |
| Metering per Output Receptacle      | No                                                                                        |
| Remote Outlet Switching             | No                                                                                        |
| Environmental Sensor Ready          | Yes                                                                                       |
| Replaceable Controller              | No                                                                                        |
| Compatible Sensors                  | Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure   |
| Networking                          | (10/100 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)                               |
| Remote Management                   | HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC       |
| Cascading                           | Yes, Max 8 PDUs can be daisy chained using USB connection                                 |
| Onboard Display                     | 3-digit LED user-selectable display : Voltage, current, or active power (per line)        |
| Embedded Processor                  | ARM9 400MHZ (Atmel SAM9G20), 16MB NOR Flash, 64MB SDRAM                                   |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### INPUT

|                       |                                |
|-----------------------|--------------------------------|
| Input Plug            | NEMA L6-30P (2P3W)             |
| Cord Length           | 3 meters (9.84 feet) standard  |
| Cord Entry            | Rear feed                      |
| Cable Type            | IP44("splashproof")            |
| Number of Power Cords | 4                              |
| Maximum Input Current | 30A                            |
| Nominal Input Voltage | 208V                           |
| Rated Input Voltage   | 200 - 240V                     |
| Input Frequency       | 50/60Hz                        |
| Power Capacity        | 0.0kVA at 200V, 0.0kVA at 240V |

### OUTPUT

|                                  |                      |
|----------------------------------|----------------------|
| Nominal Output Voltage           | 208V                 |
| Rated Output Voltage             | 200 - 240V           |
| Receptacles (Output Connections) | (4) NEMA L6-30R, 24A |
| Securelock Support               | No                   |
| Cord Retention                   | No                   |
| Overload Protection              | N/A                  |

### PHYSICAL

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Color                       | Black powder coat (custom colors available)     |
| Unit Dimensions (WxDxH)     | 17.3" x 11.3" x 1.7" ; 440mm x 287mm x 44mm     |
| Unit Weight                 | 11.2 kg                                         |
| Shipping Weight             | 14.7 kg                                         |
| Shipping Dimensions (WxDxH) | 21.85" x 21.46" x 9.65" ; 555mm x 545mm x 245mm |
| Mounting                    | RACK-KIT-PX-1U-P                                |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### ENVIRONMENTAL

|                             |           |
|-----------------------------|-----------|
| Operating Temperature       | 60°C      |
| Operating Relative Humidity | 85%       |
| Operating Elevation         | 0-10000ft |

### CONFORMANCE

|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Regulatory Approvals | UL Listed, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant |
| Warranty             | Standard 2 years manufacturer warranty                                       |


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### CONTROL PANEL

Dimension: 111.5mm x 40.5mm

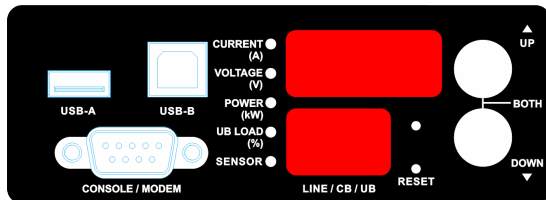


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### ELECTRICAL (ONE LINE) DIAGRAM

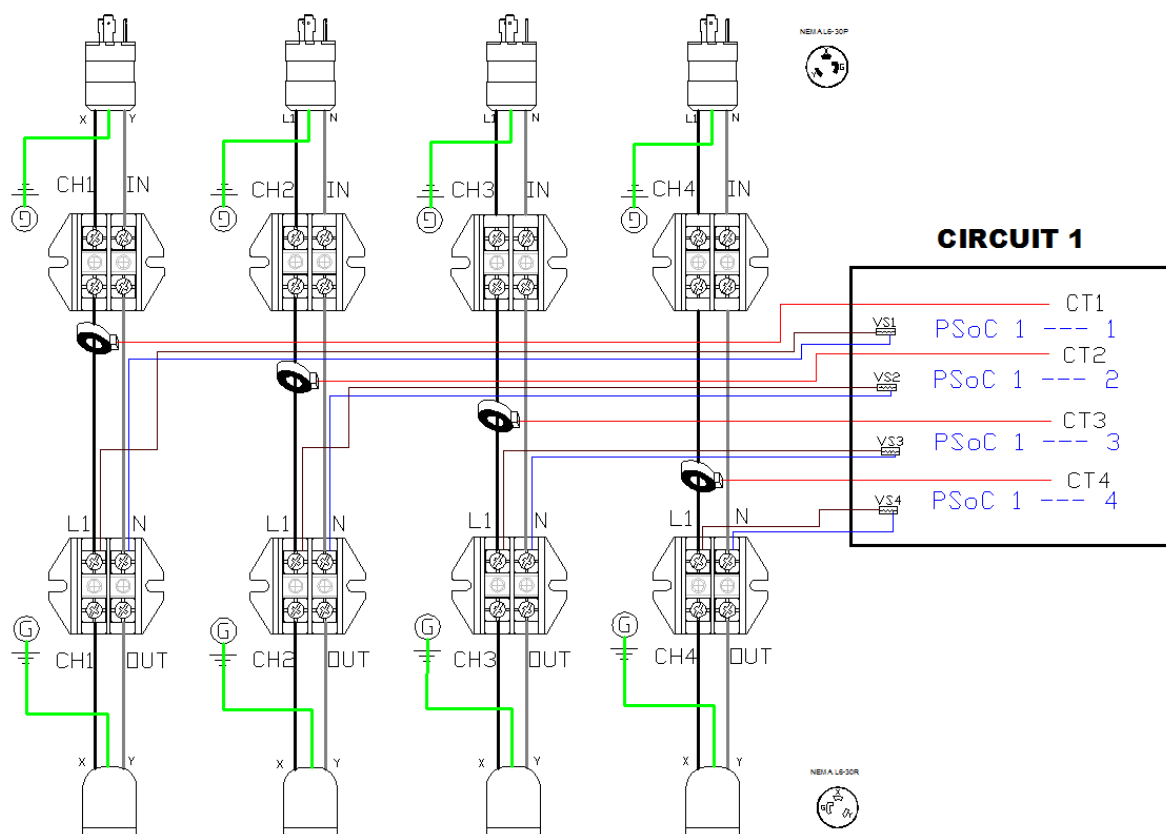


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-3423-A3A7

rev20180322

### MECHANICAL DIAGRAM

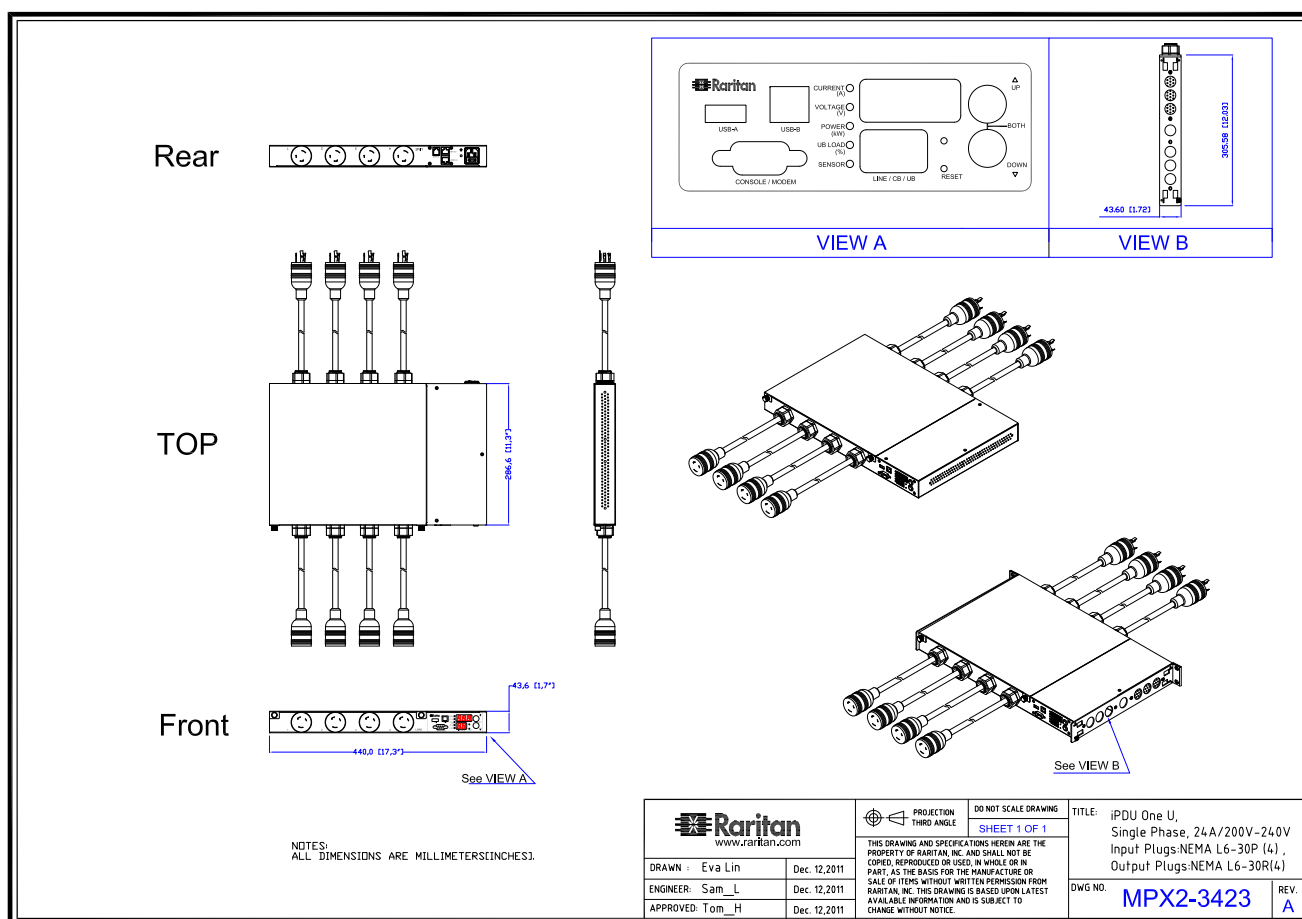

## **Technical Specifications / Engineering Submittals**

Raritan Model Number: PX2-3423-A3A7

rev20180322

### **TRIP CURVE**

This file generated on: Thu, March 22, 2018 - 05:52:33