



VIEW A



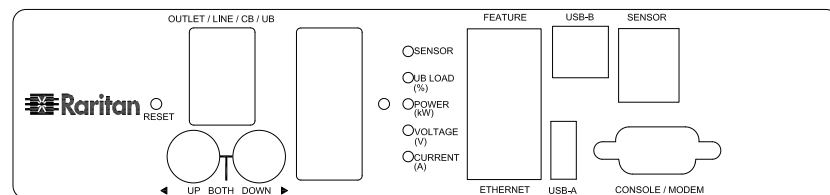


VIEW B

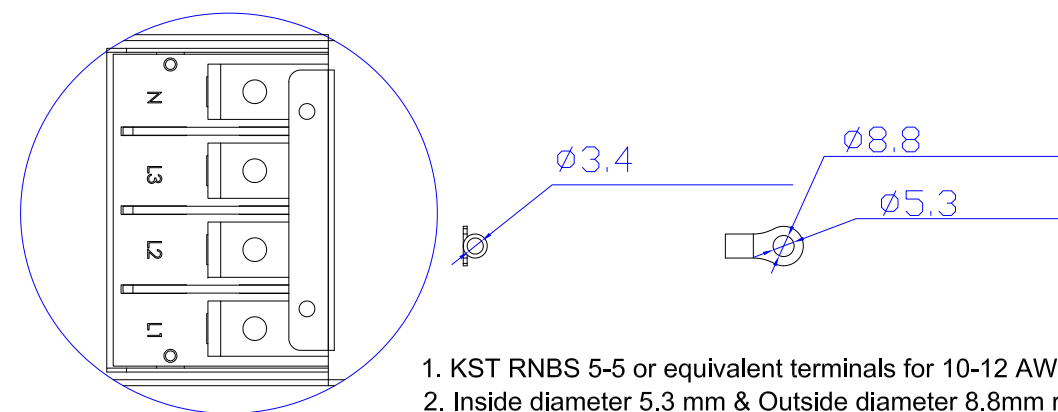


1. KST RNBS 5-5 or equivalent terminals for 10-12 AWG Wire
2. Inside diameter 5.3 mm & Outside diameter 8.8mm ring for M5 screw

VIEW C

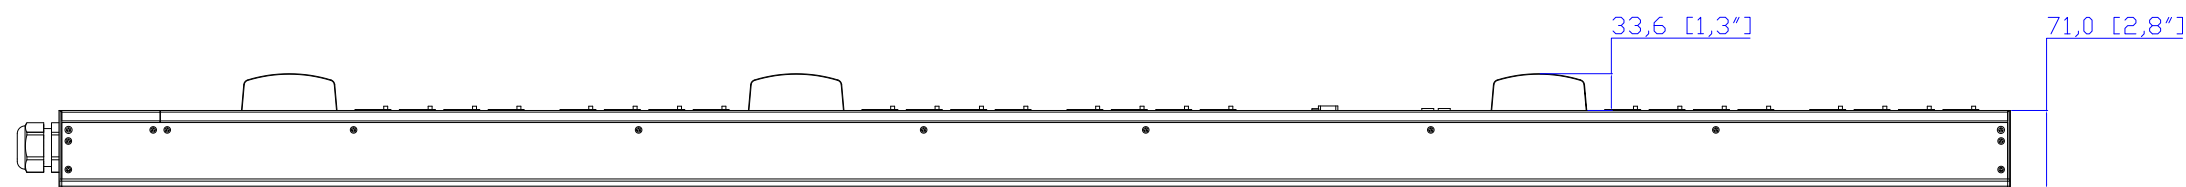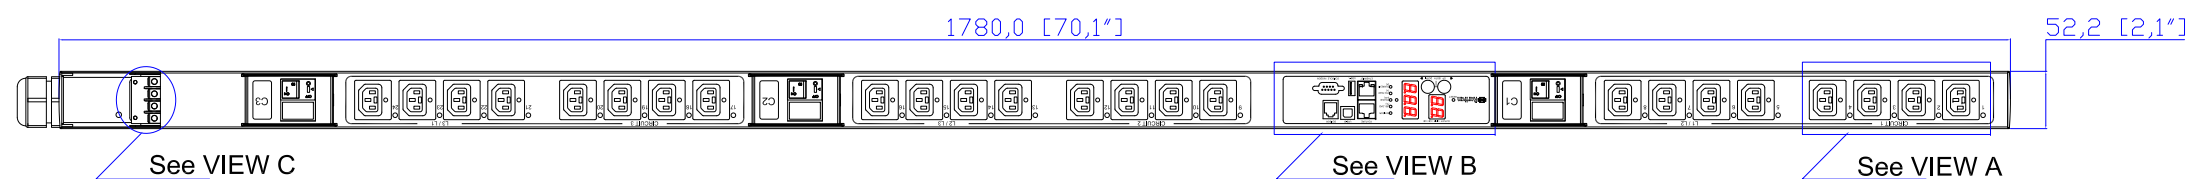

M32 Cable Gland  
Assembly Wire Range: 16~22mm



NOTES:  
1.ALL DIMENSIONS ARE MILLIMETERS[INCHES].



DRAWN :	EVA LIN	Oct. 24,2011
ENGINEER:	Kevin_L	Oct. 24,2011
APPROVED:	Tom_H	Oct. 24,2011

PROJECTION THIRD ANGLE  
DO NOT SCALE DRAWING  
**SHEET 1 OF 1**

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:  
iPDU Zero U,  
Three Phase, 24A/208V-240V ,  
Plug Type:24A Terminal 3P  
Outlet Type:(24)Locking IEC320 C13

DWG NO.  
**MPX2-4520XV-E2 & MPX2-5520XV-E2**

REV.  
**A**