



VIEW A


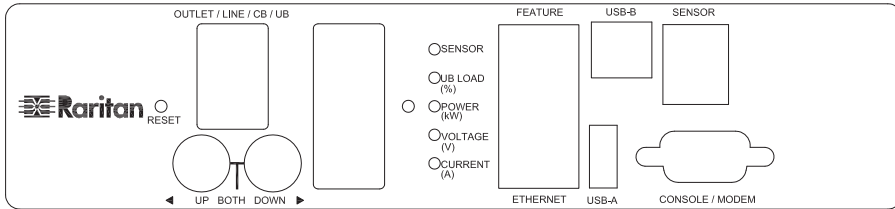


VIEW B

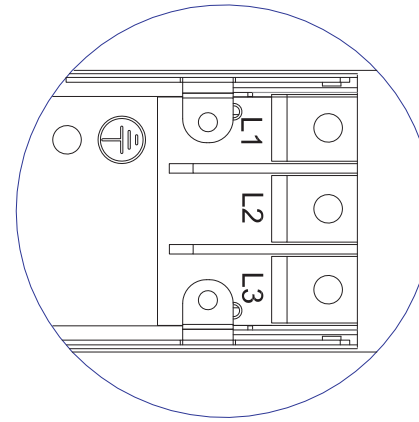


-
1. KST RNBS 22-6 or equivalent terminals for 4 AWG wire
 2. Inside diameter 6.4mm & Outside diameter 12.2mm terminal ring for M6 screw

VIEW C

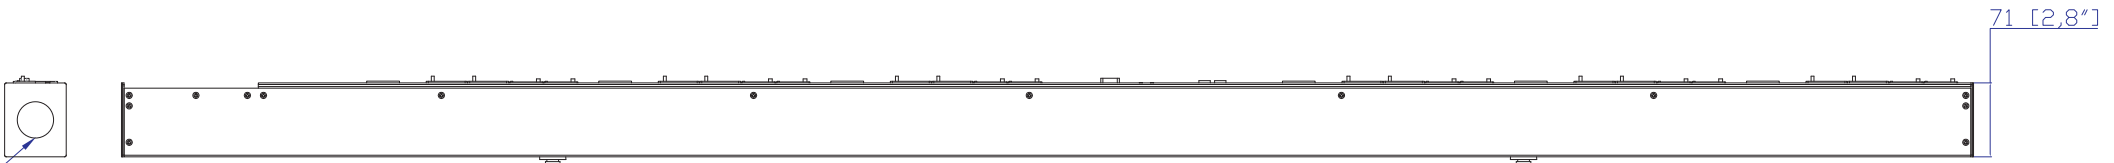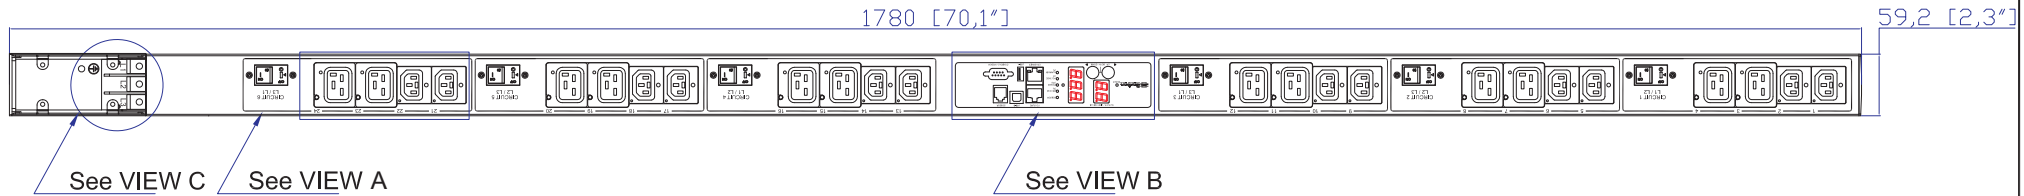

Knockout size (opening): 1.375" for Ø1" flexible steel conduit cable and fitting

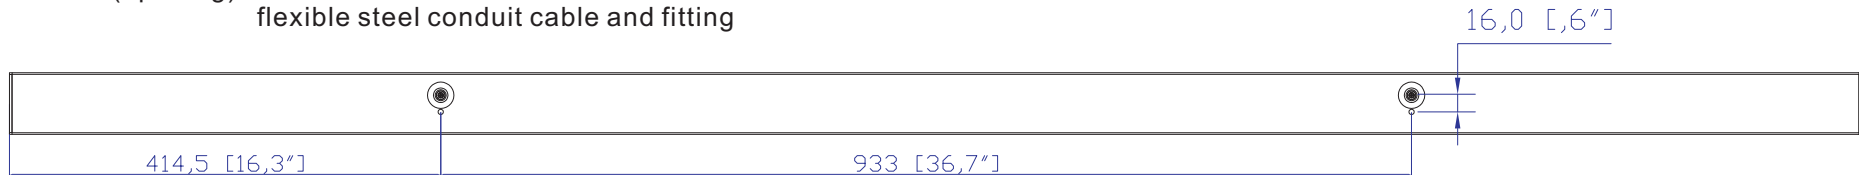

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].

 www.raritan.com	 PROJECTION THIRD ANGLE	DO NOT SCALE DRAWING SHEET 1 OF 1	TITLE: iPDU Zero U, Three phase 48A / 208-240V Plug Type: 48A Terminal 3P Outlet Type: (12)LockingC13, (12)LockingC19 DWG NO. MPX2-4551YV-E2N2V2	REV. A	
	DRAWN : Tom Hsueh Jun. 05. 2013	THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.			
	ENGINEER: Tom Hsueh Jun. 05. 2013 APPROVED: Tom Hsueh Jun. 05. 2013				