



VIEW A

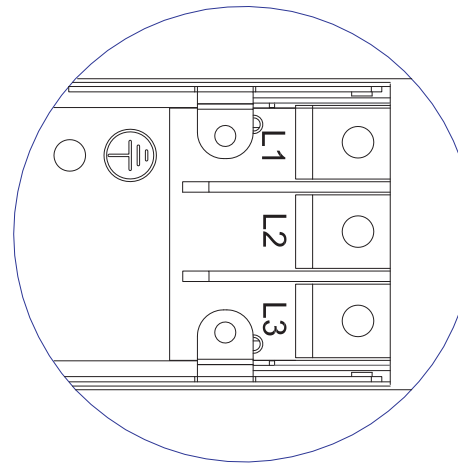


- Ø7.7 Ø12.2
Ø6.4
1. KST RNBS 22-6 or equivalent terminals for 4 AWG wire
 2. Inside diameter 6.4mm & Outside diameter 12.2mm terminal ring for M6 screw


VIEW C

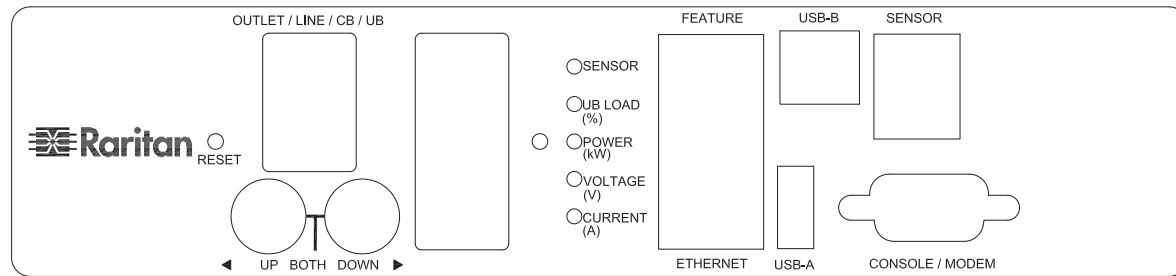

VIEW B

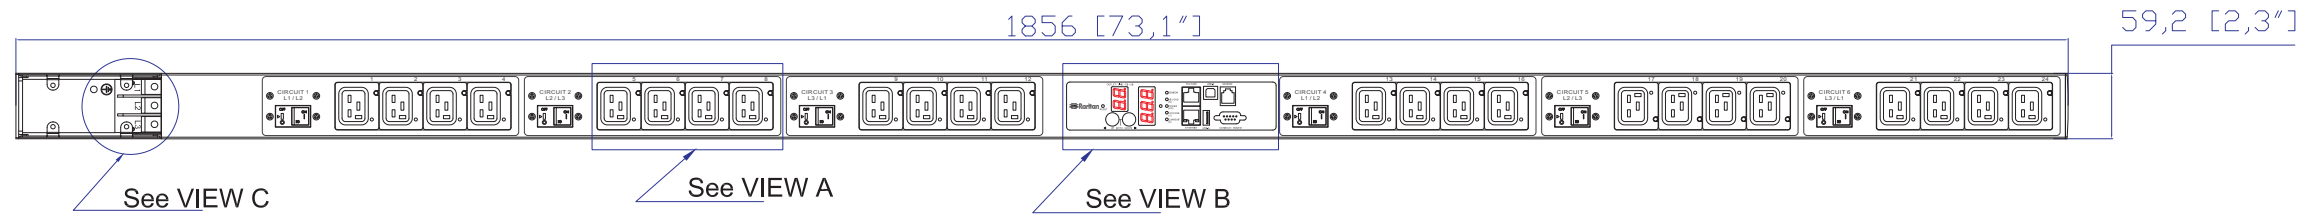

Knockout size (opening): 1.375" for Ø1" flexible steel conduit cable and fitting

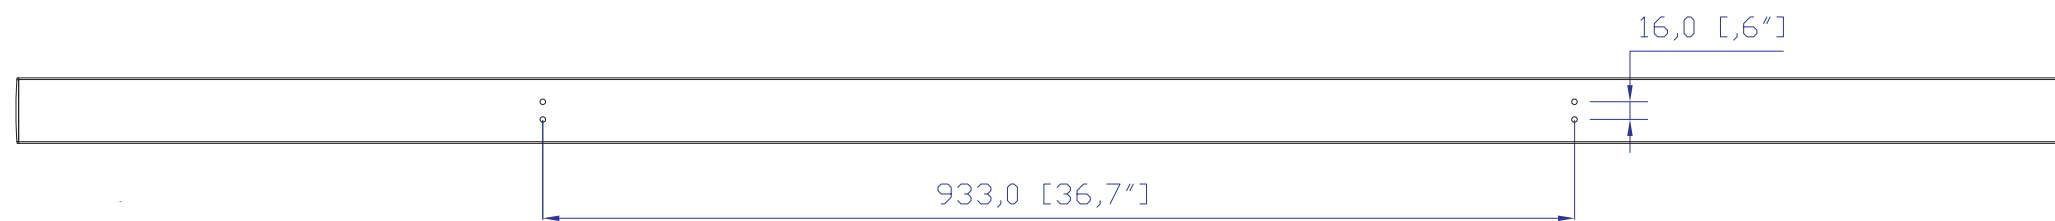

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



PROJECTION THIRD ANGLE
DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:
iPDU Zero U
Three phase 48A / 208-240V
Plug Type: 48A Terminal 3P
Outlet Type: (24) Locking IEC320 C19

DRAWN : Eva Lin Jan. 23. 2014
ENGINEER: Siang Hung Jan. 23. 2014
APPROVED: Tom Hsueh Jan. 23. 2014

DWG NO. MPX2-4695YU-E2N2P1V2
REV. A