



VIEW A

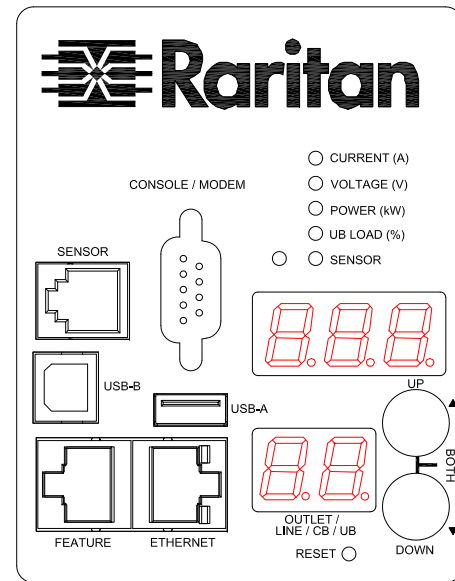


VIEW B

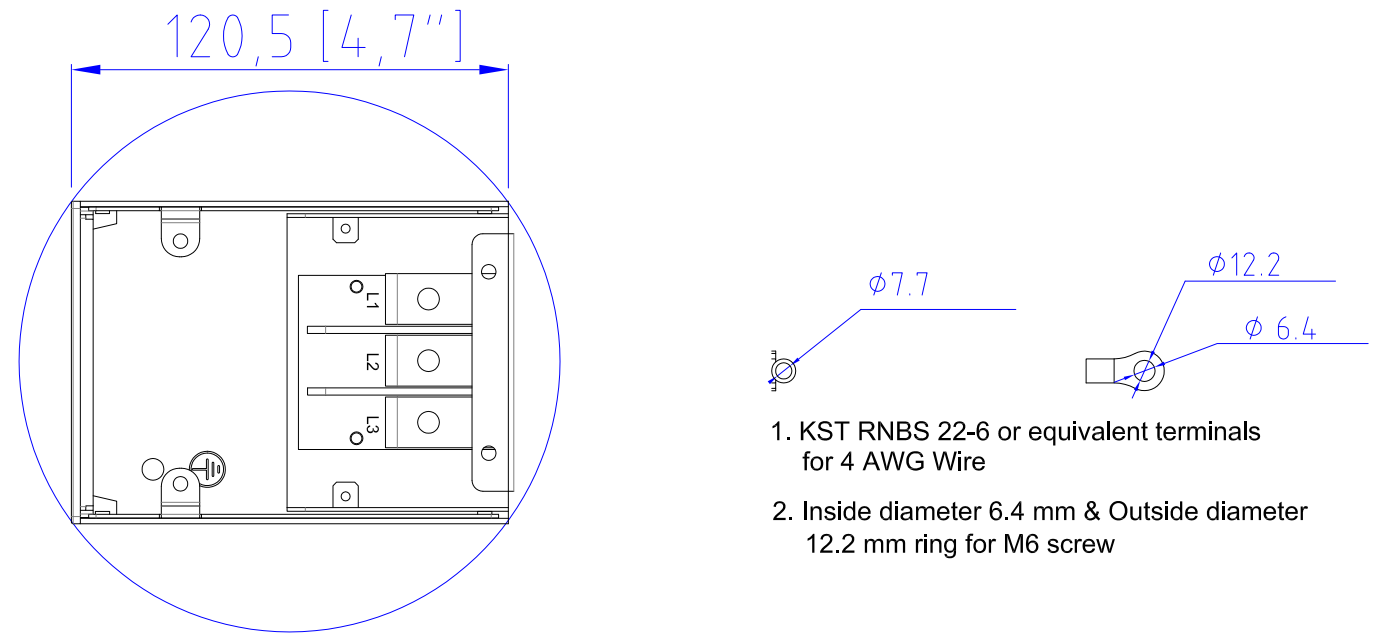


VIEW C

1. KST RNBS 22-6 or equivalent terminals for 4 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 12.2 mm ring for M6 screw

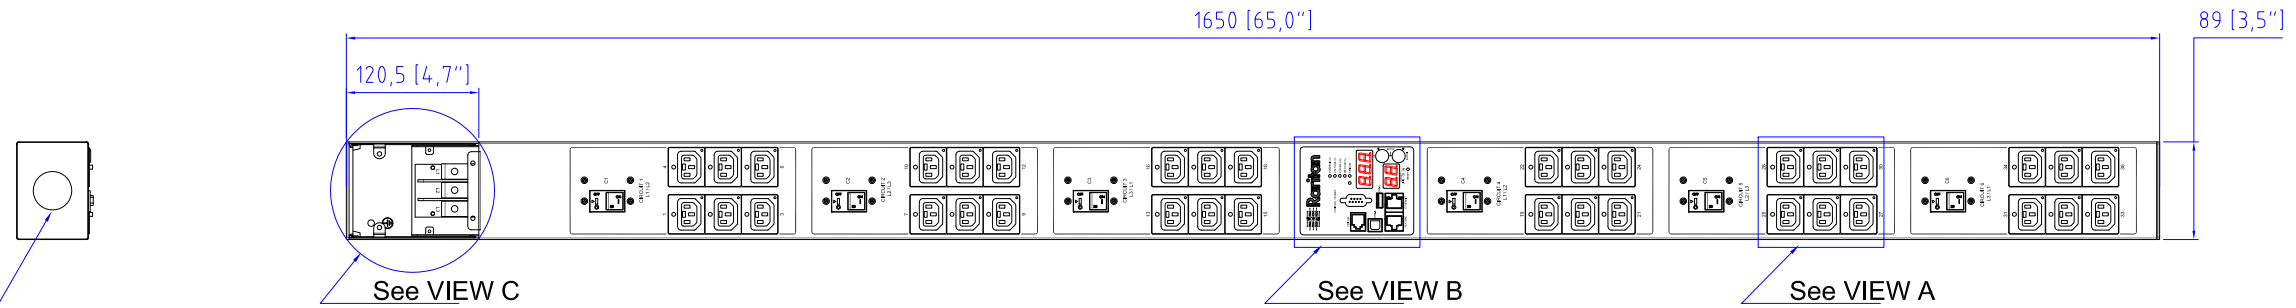

Knockout size: 1.375" for Ø1" flexible steel conduit cable and fitting

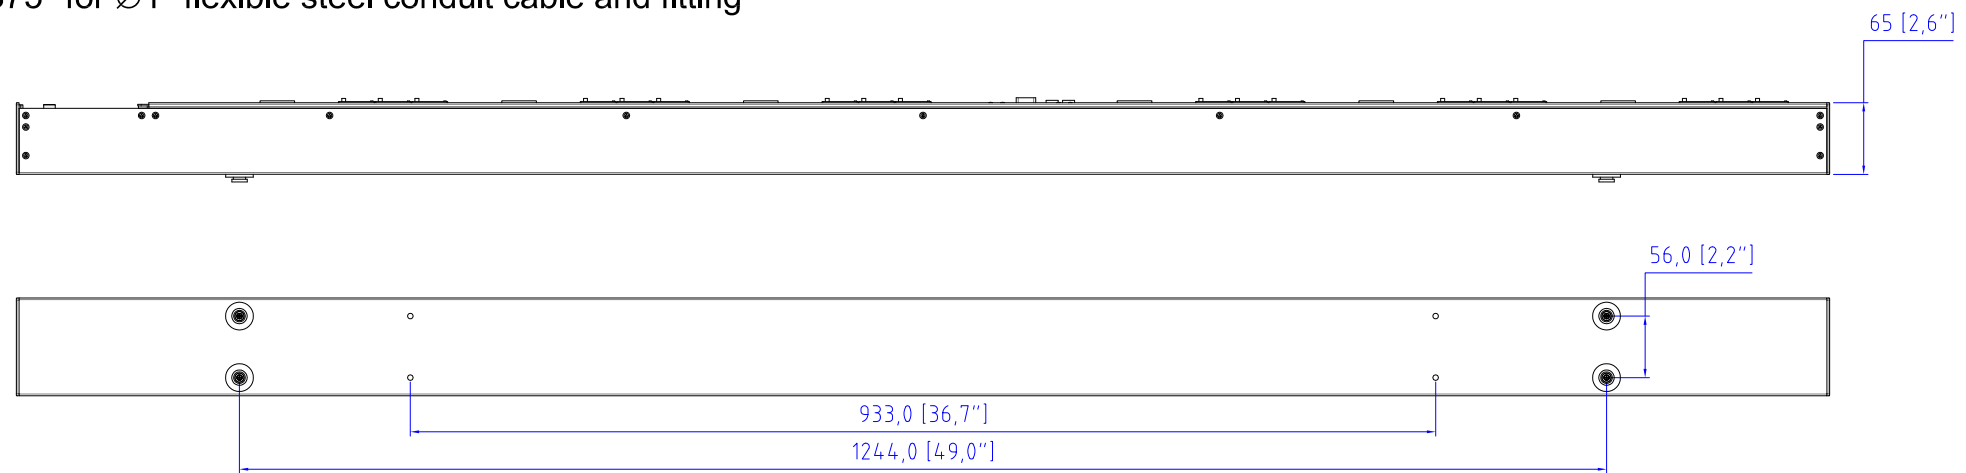

NOTES:
1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].

Raritan www.raritan.com		PROJECTION THIRD ANGLE DO NOT SCALE DRAWING SHEET 1 OF 1	TITLE: iPDU Zero U	
			Three Phase, 48A/208V-240V Plug Type: 48A Terminal 3P Outlet Type: (36)Locking C13	
Drawing Maker: Eva LIN	Feb. 05, 2015	THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.		DWG NO. MPX2-4779YU-E2N201P1V2
Design Engineer: Siang_H	Feb. 05, 2015			REV. 0B
Approver: Tom_H	Feb. 05, 2015			