

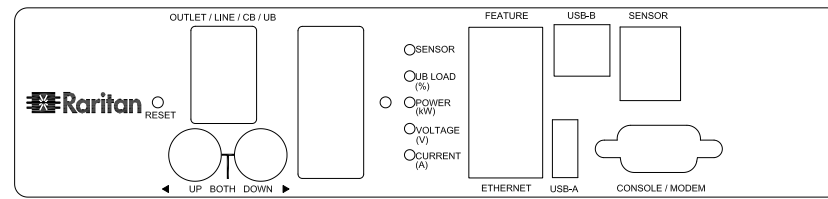


VIEW A

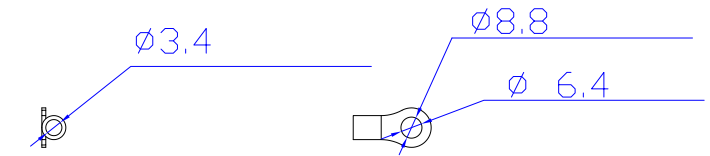


VIEW B

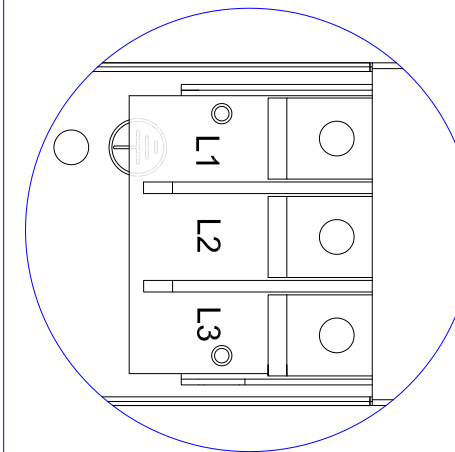


1. KST RNBS 22-6 or equivalent terminals for 4 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 8.8mm ring for M6 screw

VIEW C

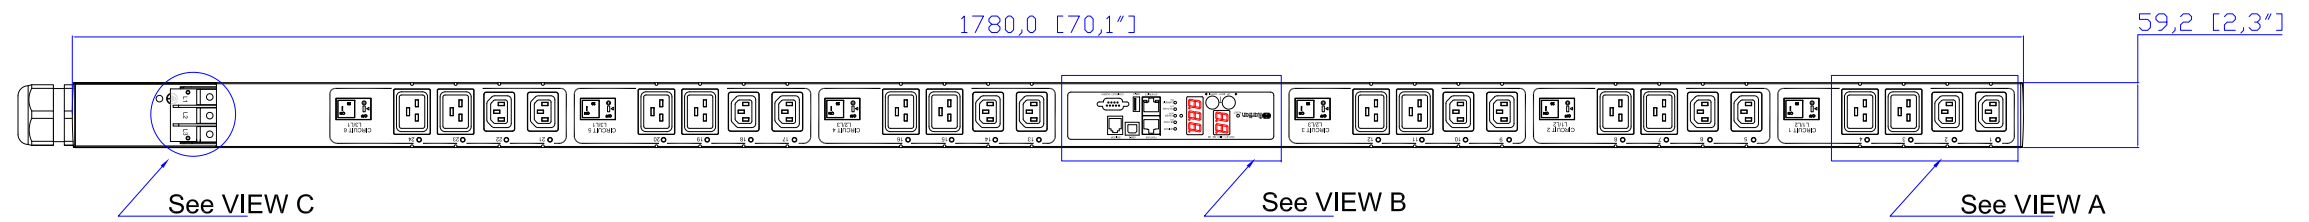

M50 Cable Gland
Assembly Wire Range: 24~35mm

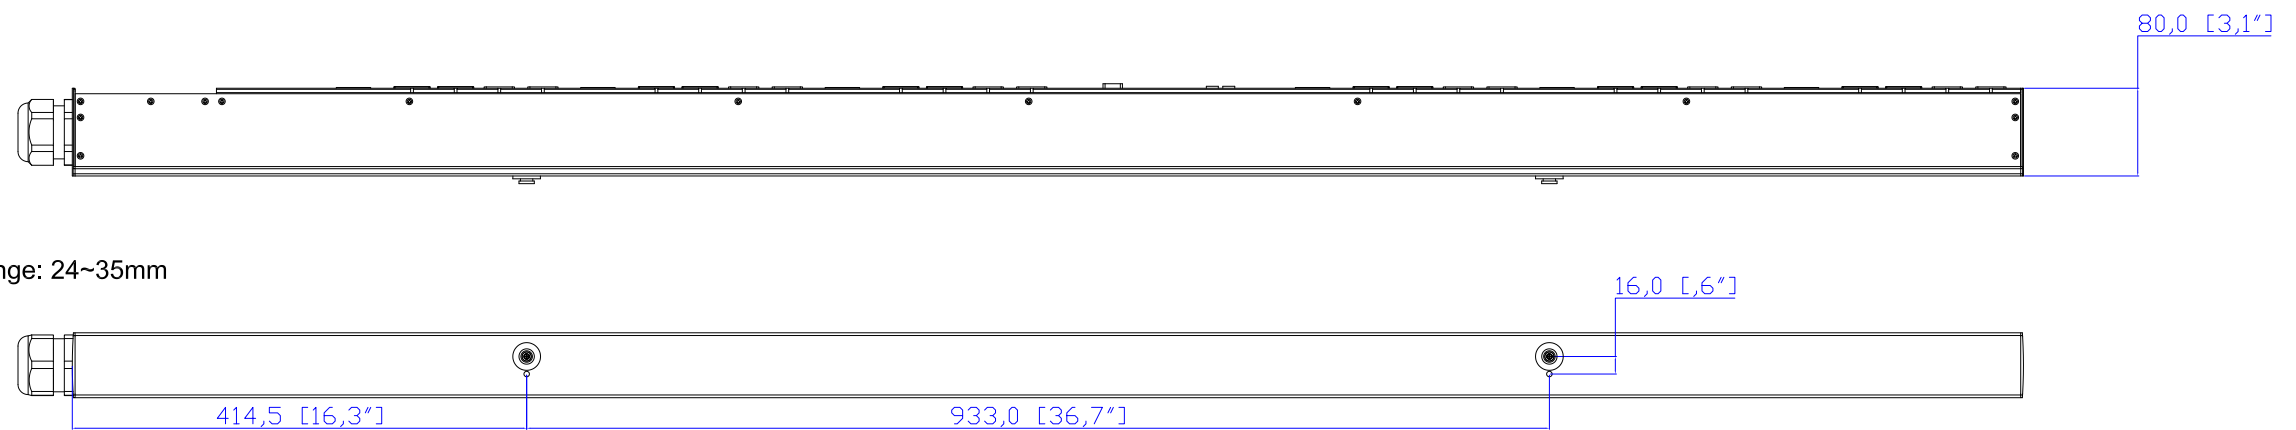

NOTES:
1.ALL DIMENSIONS ARE MILLIMETERS[INCHES].



DRAWN : EVA LIN Apr. 17,2012
ENGINEER: Siang_H Apr. 17,2012
APPROVED: Tom_H Apr. 17,2012

PROJECTION THIRD ANGLE
DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:
iPDU Zero U,
Three Phase, 48A/208V-240V ,
Plug Type:48A Terminal 3P,
Outlet Type:(12)IEC320 C13, (12)IEC320 C19

DWG NO. **MPX2-4551XV & MPX2-5551XV** REV. **A**