



IEC60309 32A

VIEW A

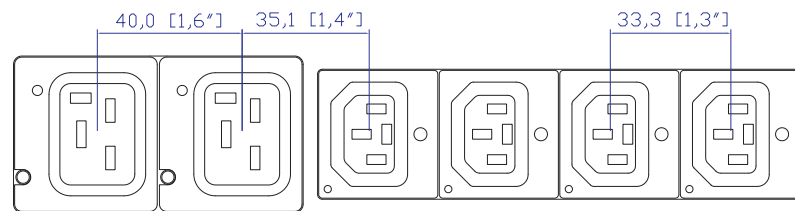


VIEW B

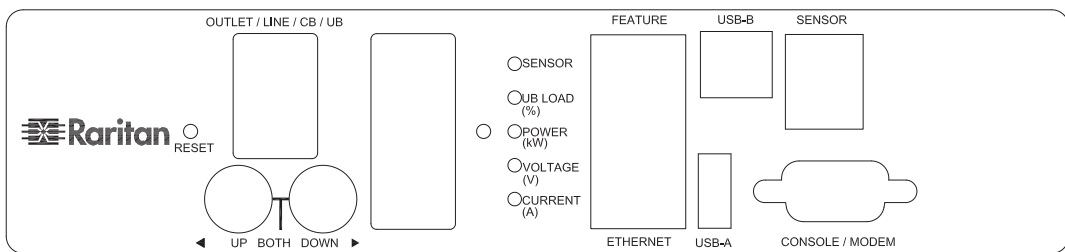


VIEW C

IEC60309 32A





See VIEW A





See VIEW B

See VIEW C

52,2 [2,1\"/>

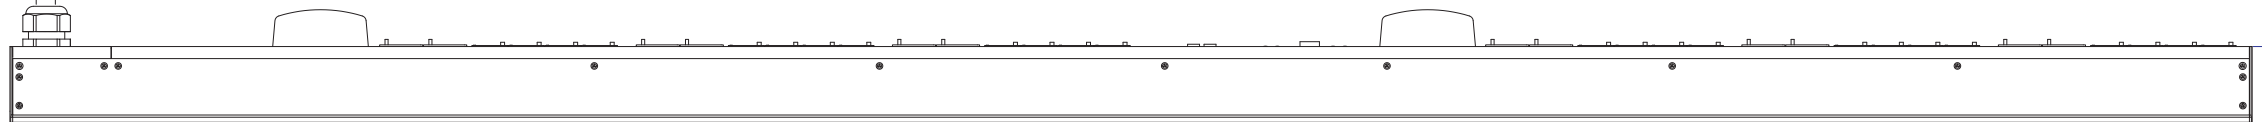

71,0 [2,8\"/>

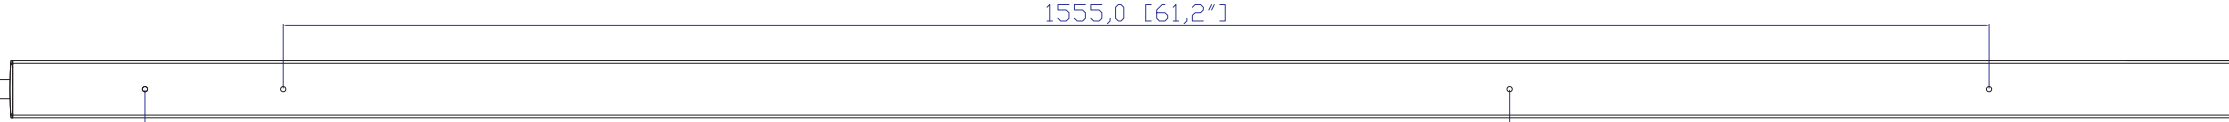

1244,0 [49,0\"/>

NOTES:
1.ALL DIMENSIONS ARE MILLIMETERS[INCHES].



PROJECTION
THIRD ANGLE

DO NOT SCALE DRAWING

SHEET 1 OF 1

DRAWN : Tom Hsueh Oct. 24. 2013
ENGINEER: Tom Hsueh Oct. 24. 2013
APPROVED: Tom Hsueh Oct. 24. 2013

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

iPDU Zero U,
Single Phase, 32A/ 200-240V
Plug Type: IEC60309 32A
Outlet Type: (24) Locking IEC 320 C13,
(12) Locking IEC 320 C19

DWG NO

MPX2-5886-E2

REV.

A