
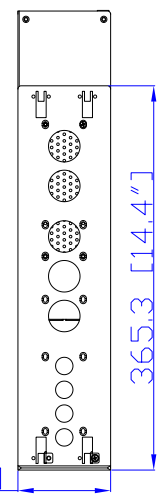








CS8365C


VIEW A

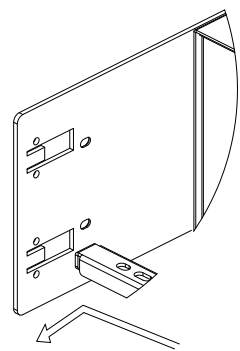

88.1 [3.5"]

365.3 [14.4"]

VIEW B

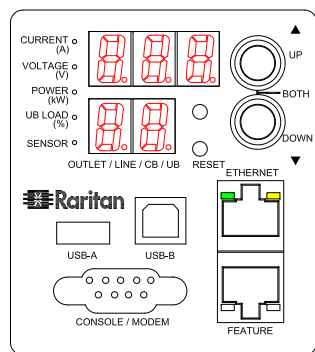


VIEW C


Rear



CS8365C





See VIEW A

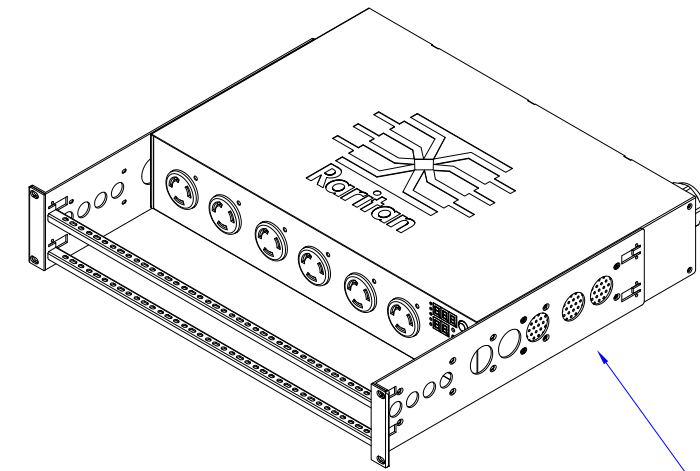

See VIEW B


TOP

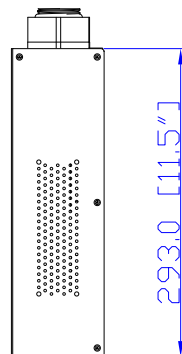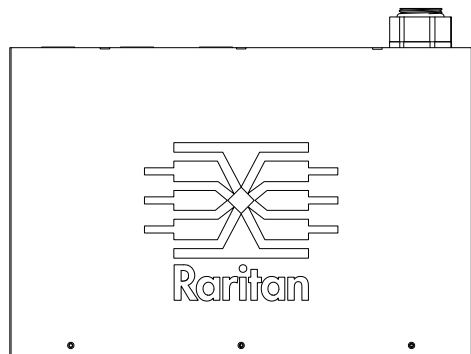

293.0 [11.5"]

88.1 [3.5"]

Front

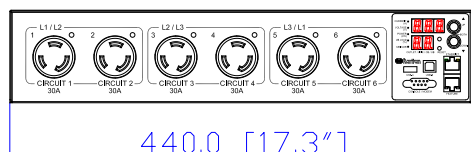

440.0 [17.3"]

NOTES:  
ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).

See VIEW C



PROJECTION  
THIRD ANGLE

DO NOT SCALE DRAWING

SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

DRAWN : EVA LIN Apr. 25,2012

ENGINEER: Sam\_L Apr. 25,2012

APPROVED: Tom\_H Apr. 25,2012

TITLE: iPDU TwoU,  
Three phase, 40A/208V-240V  
Plug Type: CS8365C  
Outlet Type :(6) NEMA L6-30R

DWG NO. **MPX2-5940 & MPX2-4940** REV. **A.2**