



VIEW A

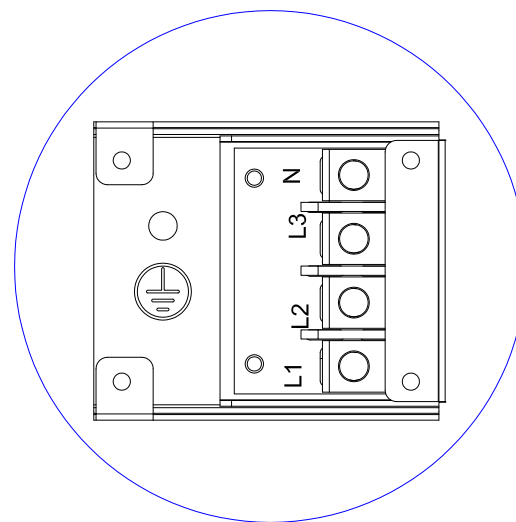

- $\phi 3.4$
 $\phi 8.9$
 $\phi 5.3$
1. KST RNBS 5-5 or equivalent terminals for 10 AWG Wire
 2. Inside diameter 5.3 mm & Outside diameter 8.9 mm ring for M5 screw

VIEW C

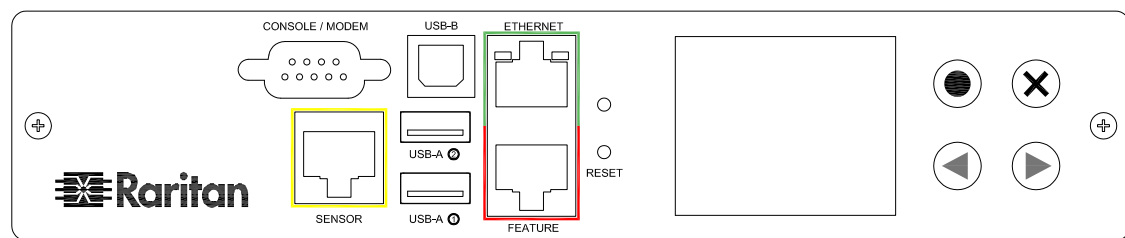

VIEW B

60.4 [2.4"] See VIEW C



M40 Cable Gland
Assembly Wire Range: 22~32mm

1780 [70.1"]

52 [2.1"]

See VIEW B

See VIEW A

55 [2.2"]

243.0 [9.6"]

933.0 [36.7"]

1244.0 [49.0"]

NOTES:

1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



Drawing Maker:	EVA LIN	Apr. 14, 2016
Design Engineer:	Siang_H	Apr. 14, 2016
Approver:	Tom_H	Apr. 14, 2016



DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:
iPDU Zero U
Three phase 24A / 190-208V
Plug Type: 24A Terminal 3PY
Outlet Type: (18)IEC320 C13,(6)IEC320 C19

DWG NO. **MPX3-1027XV-O1** REV. **0A**