

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### LINE DRAWING



### FEATURES

|                                     |                                                                                                                                                                                                |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Energy Metering                     | Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor                                                                                                      |
| Metering Accuracy                   | ISO/IEC 62053-21 1% (see page 3 for details)                                                                                                                                                   |
| Metering per Input Line             | Yes                                                                                                                                                                                            |
| Metering per Branch Circuit Breaker | Yes                                                                                                                                                                                            |
| Metering per Output Receptacle      | No                                                                                                                                                                                             |
| Remote Outlet Switching             | No                                                                                                                                                                                             |
| Environmental Sensor Ready          | Yes                                                                                                                                                                                            |
| Replaceable Controller              | Yes                                                                                                                                                                                            |
| Compatible Sensors                  | Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure                                                                                                        |
| Networking                          | Gigabit (10/100/1000 BaseT) Ethernet port; secondary, redundant (10/100/1000 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)                                                               |
| Remote Management                   | HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC; Modbus over TCP                                                                                           |
| Cascading                           | Yes, Max 16 PDUs can be daisy chained using a USB connection and 32 PDUs using Ethernet connection                                                                                             |
| Onboard Display                     | Color, matrix LCD display : Voltage, current, or active power (per line or per breaker); Alarms; Configuration information (name, ratings, IP / Networking information); Auto-flip orientation |
| Embedded Processor                  | ARM Cortex A5 536MHZ (Atmel A5D35A), 16MB SPI Flash, 64MB DDR2 RAM                                                                                                                             |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### INPUT

|                       |                                  |
|-----------------------|----------------------------------|
| Input Plug            | IEC 60309 3P+N+E 6h 32A (4P5W)   |
| Cord Length           | 3 meters (9.84 feet) standard    |
| Cord Entry            | Bottom-front feed                |
| Cable Type            | IP44("splashproof")              |
| Number of Power Cords | 1                                |
| Maximum Input Current | 32A                              |
| Nominal Input Voltage | 400V 3 phase                     |
| Rated Input Voltage   | 380 - 415V 3 phase               |
| Input Frequency       | 50/60Hz                          |
| Power Capacity        | 21.1kVA at 380V, 23.0kVA at 415V |

### OUTPUT

|                                  |                                             |
|----------------------------------|---------------------------------------------|
| Nominal Output Voltage           | 230V                                        |
| Rated Output Voltage             | 220 - 240V                                  |
| Receptacles (Output Connections) | (18) IEC320 C13, 10A<br>(6) IEC320 C19, 16A |
| Securelock Support               | Yes                                         |
| Cord Retention                   | Yes                                         |
| Overload Protection              | (6) LEGBXA6-16                              |

### PHYSICAL

|                             |                                                |
|-----------------------------|------------------------------------------------|
| Color                       | Black powder coat (custom colors available)    |
| Unit Dimensions (WxDxH)     | 2.1" x 2.2" x 70.1" ; 52mm x 55mm x 1780mm     |
| Unit Weight                 | TBD                                            |
| Shipping Weight             | TBD                                            |
| Shipping Dimensions (WxDxH) | 9.06" x 4.65" x 75.2" ; 230mm x 118mm x 1910mm |
| Mounting                    | RACK-KIT-PX2-1K-ZU                             |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### ENVIRONMENTAL

|                             |           |
|-----------------------------|-----------|
| Operating Temperature       | 60°C      |
| Operating Relative Humidity | 85%       |
| Operating Elevation         | 0-10000ft |

### CONFORMANCE

|                      |                                                                       |
|----------------------|-----------------------------------------------------------------------|
| Regulatory Approvals | CE, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant |
| Warranty             | Standard 2 years manufacturer warranty                                |

### ACCURACY

|                   | Input Measurement         |
|-------------------|---------------------------|
| LCD & GUI Current | ±1% at 0.1 A resolution   |
| Voltage           | ±1% at 0.1 V resolution   |
| Active Power      | ±1% at 1 W resolution     |
| Apparent Power    | ±1% at 1 VA resolution    |
| Power Factor      | ±1% at 0.1 resolution     |
| Active Energy     | ±1% at 0.1 kWh resolution |

### Branch Measurement


|         |                         |
|---------|-------------------------|
| Current | ±1% at 0.1 A resolution |
|---------|-------------------------|

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### CONTROL PANEL

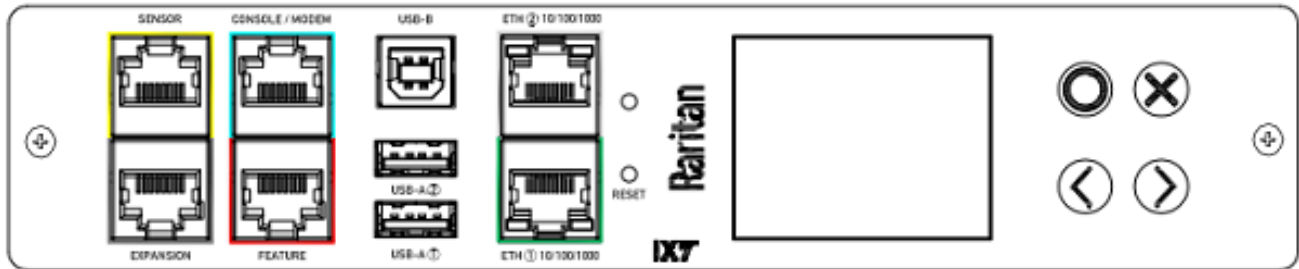


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### ELECTRICAL (ONE LINE) DIAGRAM

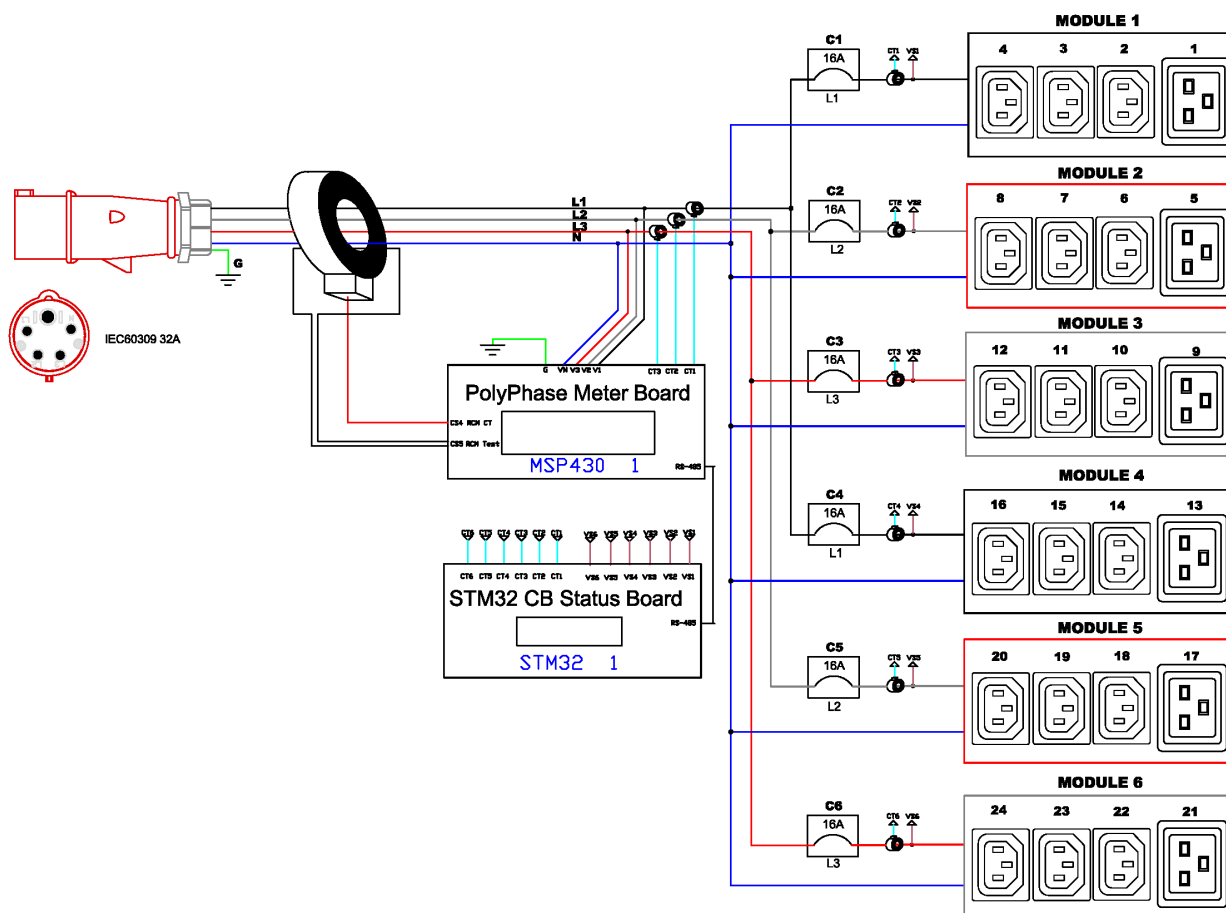


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

### MECHANICAL DIAGRAM

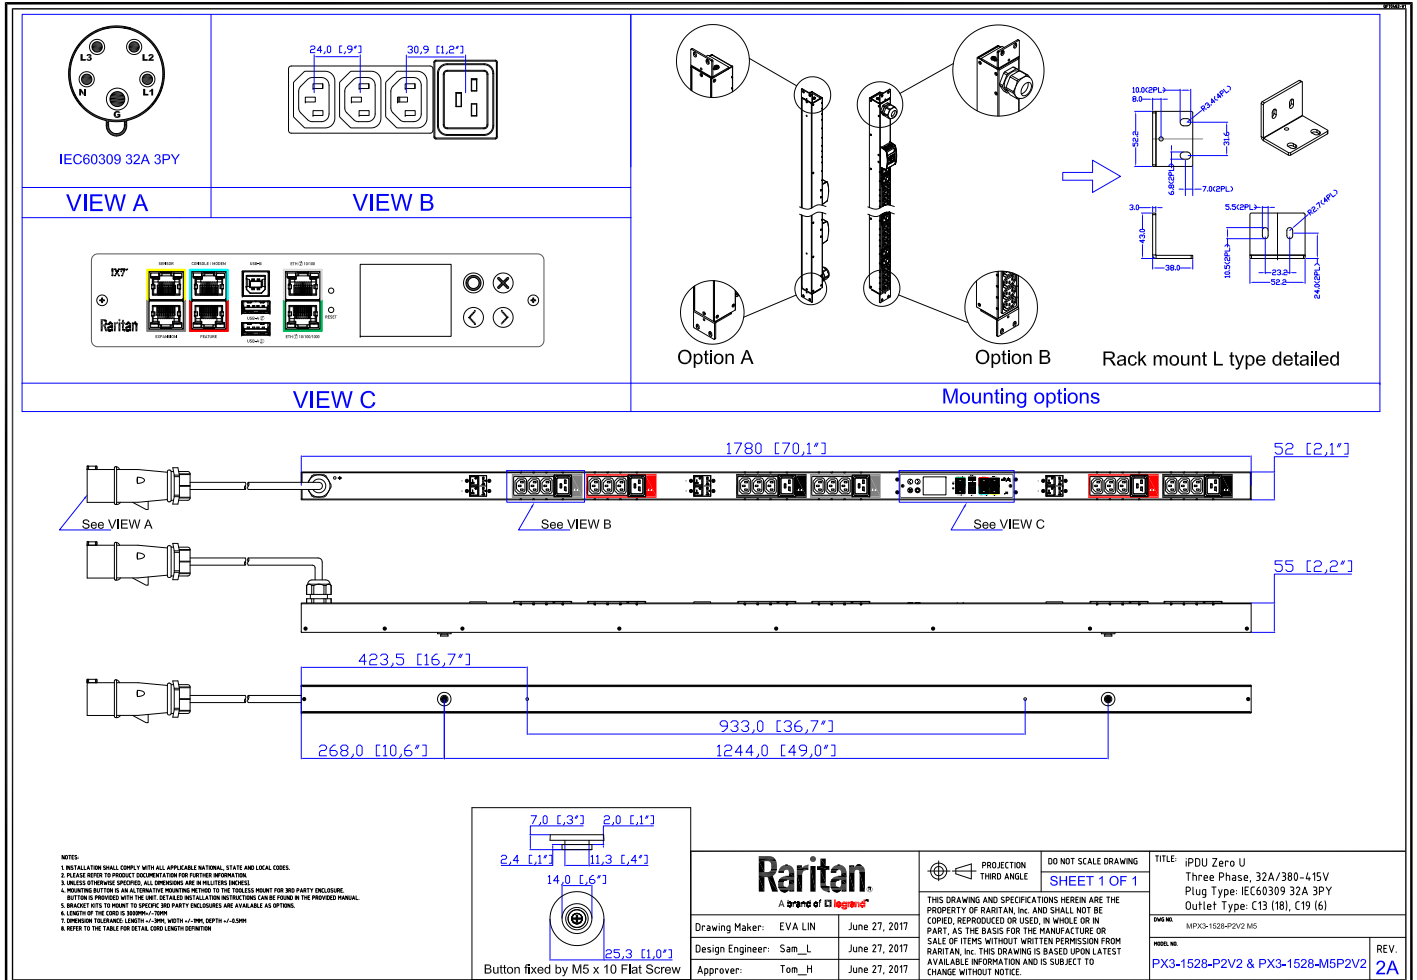


# Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-1528-M5P2V2

rev20240523

## TRIP CURVE

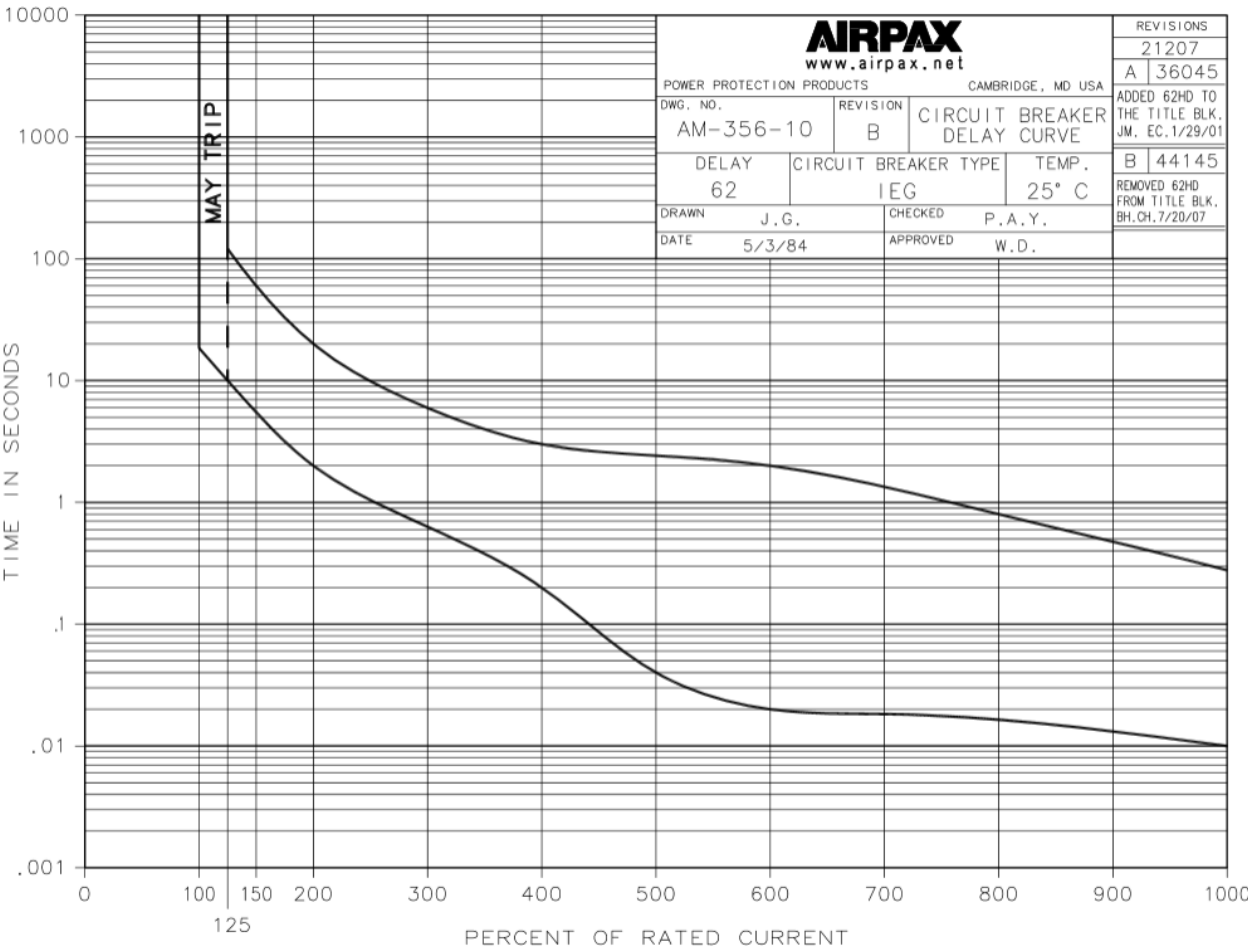

C-1009-1 5/98 32556

This file generated on: Thu, May 23, 2024 - 06:47:43