

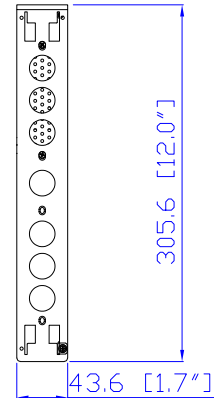









NEMA 5-15P PSE

VIEW A




VIEW B


Rear



See VIEW C



See VIEW A





VIEW C(Rotated 180 degrees)



VIEW D


TOP

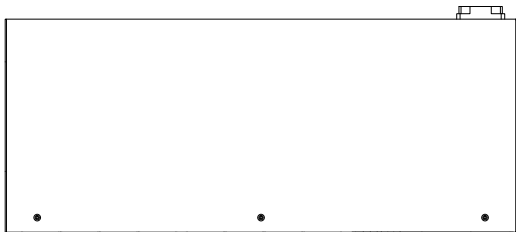

Front




See VIEW D

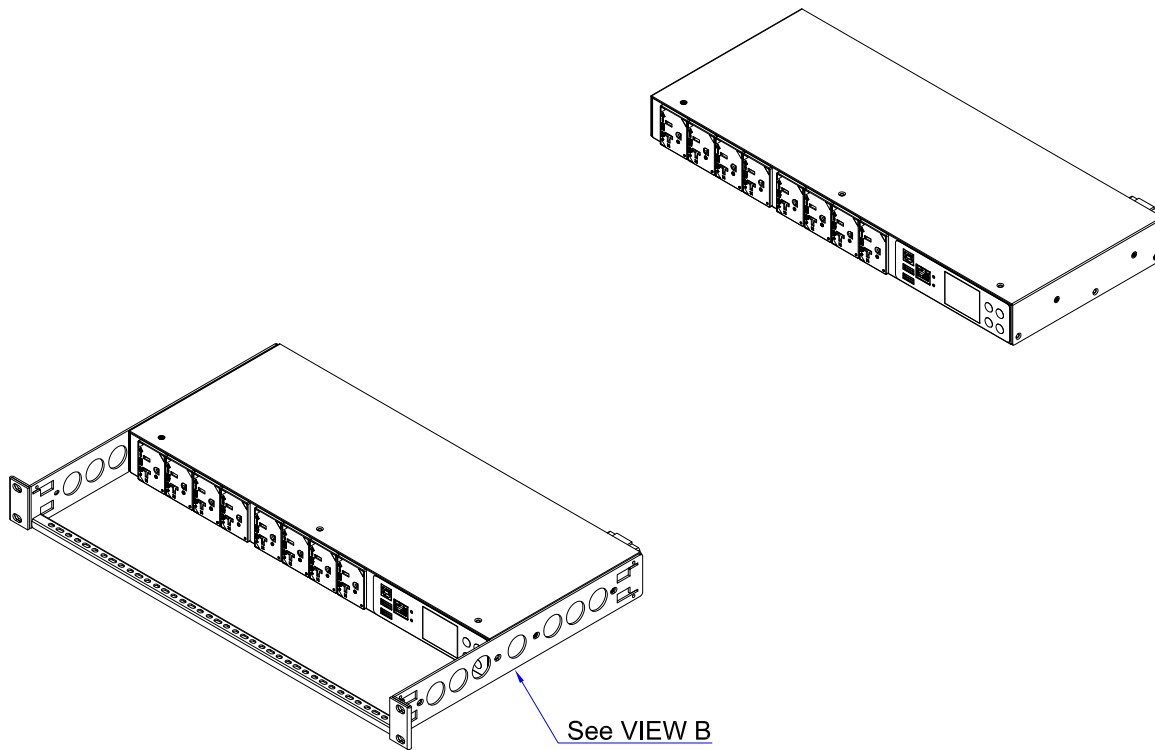

See VIEW B

NOTES:


1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURE. BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
6. RARITAN STANDARD LENGTH OF THE CORD IS 3000MM+/-70MM
7. DIMENSION TOLERANCE: LENGTH +/-3MM, WIDTH +/-1MM, DEPTH +/-0.5MM

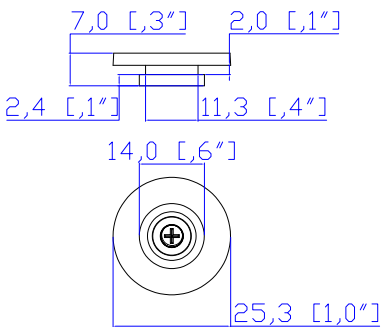

Button fixed by M5 x 10 Flat Screw

Raritan
A brand of **Legrand**

Drawing Maker: Eva Lin Jun. 08, 2023
Design Engineer: Eva Lin Jun. 08, 2023
Approver: Tom Hsueh Jun. 08, 2023



PROJECTION
THIRD ANGLE

DO NOT SCALE DRAWING
SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, Inc. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, Inc. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

SPECIFICATION
iPDU One U
100-120V, 15A
Inlet Type: IEC60320 C20
Plug Type: NEMA 5-15P PSE
Outlet Type: NEMA 5-20R (8), 15A

DWG NO.
MPX3-5145JR & MPX3-4145JR

MODEL NO.
PX3-5145JR & PX3-4145JR

REV.
2B