

rev20250625

LINE DRAWING

• :::::::::::::::::::::::::::::::::::::	• 0	Ð

FEATURES

Energy Metering	Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor	
Metering Accuracy	ISO/IEC 62053-21 1% (see page 3 for details)	
Metering per Input Line	Yes	
Metering per Branch Circuit Breaker	Yes	
Metering per Output Receptacle	Yes	
Remote Outlet Switching	Yes	
Environmental Sensor Ready	Yes	
Replaceable Controller	Yes	
Compatible Sensors	Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure	
Networking	Gigabit (10/100/1000 BaseT) Ethernet port; secondary, redundant (10/100/1000 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)	
Remote Management	HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC; Modbus over TCP	
Cascading	Yes, Max 32 PDUs can be daisy chained using a USB connection and 32 PDUs using Ethernet connection	
Onboard Display	Color, matrix LCD display : Voltage, current, or active power (per line, per breaker, or per receptacle / outlet); Alarms; Configuration informatio (name, ratings, IP / Networking information); Auto-flip orientation	
Embedded Processor	ARM Cortex A5 536MHZ (Atmel A5D35A), 16MB SPI Flash, 64MB DDR2 R	



rev20250625

INPUT	
Input Plug	NEMA L5-30P (2P3W), IP44
Cord Length	3 meters (9.84 feet) standard
Cord Entry	Top-end feed
Cable Type	VCT 3G5.5
Number of Power Cords	1
Maximum Input Current	30A
Nominal Input Voltage	120V
Rated Input Voltage	100 - 120V
Input Frequency	50/60Hz
Power Capacity	2.4kVA at 100V, 2.9kVA at 120V

OUTPUT

120V	
100 - 120V	
(24) NEMA 5-20R, 16A	
Νο	
Yes	
(2) Airpax LELBX1-20, 5KAIC	

PHYSICAL

Color	Black powder coat (custom colors available)	
Unit Dimensions (WxDxH)	2.1" x 2.6" x 60.6" ; 52mm x 65mm x 1539mm	
Unit Weight	5.6 kg	
Shipping Weight	7.6 kg	
Shipping Dimensions (WxDxH)	11.02" x 4.53" x 71.46" ; 280mm x 115mm x 1815mm	
Mounting	G2-RACK-FOR-ZU	




rev20250625

ENVIRONMENTAL				
Operating Temperature	60°C	60°C		
Operating Relative Humidity	85%	85%		
Operating Elevation	0-6000ft	0-6000ft		
CONFORMANCE				
Regulatory Approvals	UL Listed, Canada ICES-003, Pa RoHS compliant	UL Listed, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant		
Warranty	Standard 2 years manufacturer	Standard 2 years manufacturer warranty		
ACCURACY				
	Input Measurement	Output Measurement		
LCD & GUI Current	±1% at 0.1 A resolution	±1% at 0.1 A resolution		
Voltage	±1% at 0.1 V resolution	±1% at 0.1 V resolution		
Active Power	±1% at 1 W resolution	±1% at 1 W resolution		
Apparent Power	±1% at 1 VA resolution	±1% at 1 VA resolution		
Power Factor	±1% at 0.1 resolution	±1% at 0.1 resolution		
Active Energy	±1% at 0.1 kWh resolution	±1% at 0.1 kWh resolution		
Branch Measurement				
Current	±1% at 0.1 A resolution			



rev20250625

CONTROL PANEL

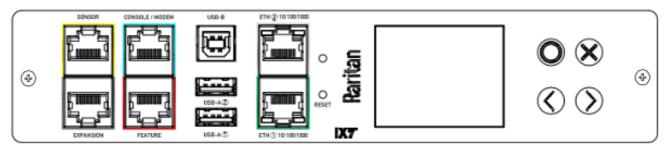




Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478U

rev20250625

ELECTRICAL (ONE LINE) DIAGRAM

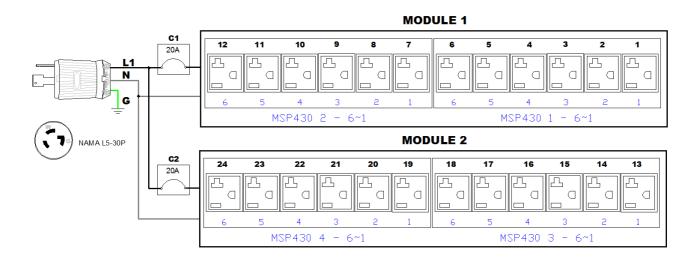




Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478U

rev20250625


MECHANICAL DIAGRAM

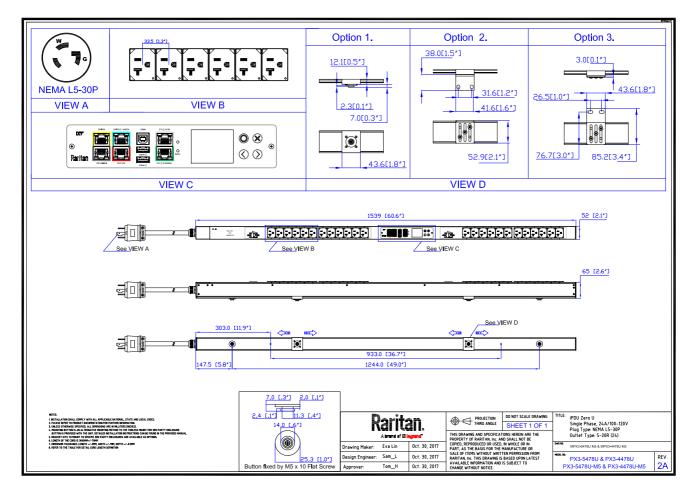



rev20250625

Mounting Diagram (G2-RACK-FOR-ZU)

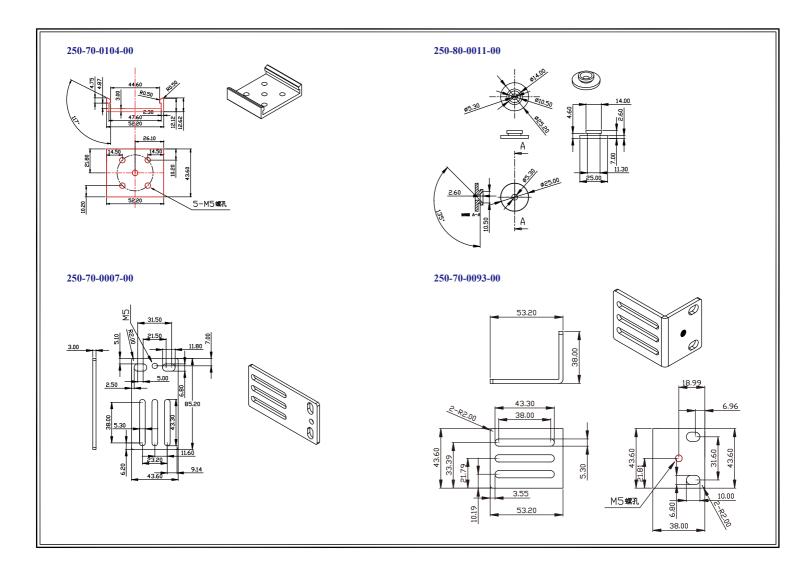




Technical Specifications / Engineering Submittals

Raritan Model Number: PX3-5478U

rev20250625

TRIP CURVE

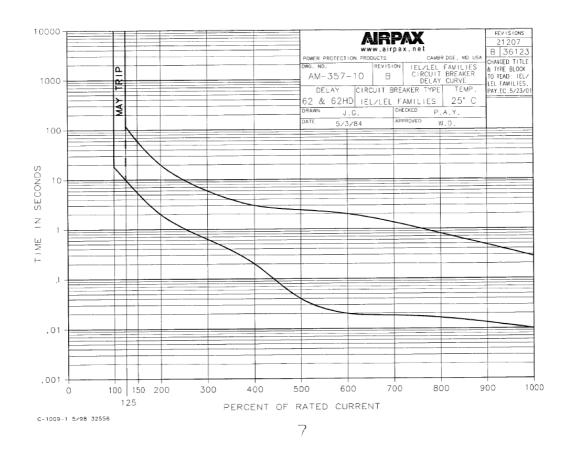

This file generated on: Wed, June 25, 2025 - 03:31:40

PDF technology powered by Apryse™ and distributed by Legrand DPC, LLC under license. All rights reserved.