



- $\phi 5.8$ $\phi 12$
 $\phi 6.4$
1. KST RNBS 14-6 or equivalent terminals for complying with UL standard wire
 2. Inside diameter 6.4 mm & Outside diameter 12 mm ring for M6 screw
 3. M6 screw torque: 30Kgf-cm
 4. Temperature rating for the terminal block: 105°C

- $\phi 7.7$ $\phi 12.2$
 $\phi 6.4$
1. KST RNBS 22-6 or equivalent terminals for complying with UL standard wire
 2. Inside diameter 6.4 mm & Outside diameter 12.2 mm ring for M6 screw
 3. M6 screw torque: 30Kgf-cm
 4. Temperature rating for the terminal block: 105°C


TERMINAL WIRE CONNECTION

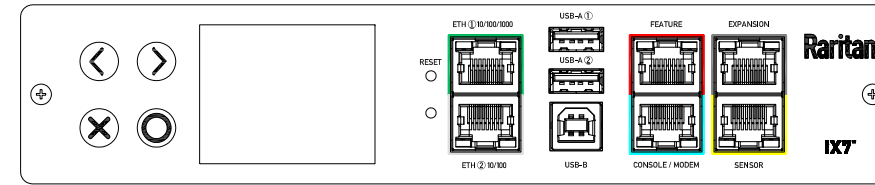




VIEW A

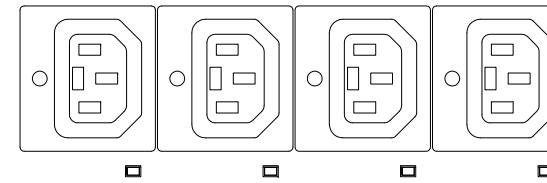

VIEW B

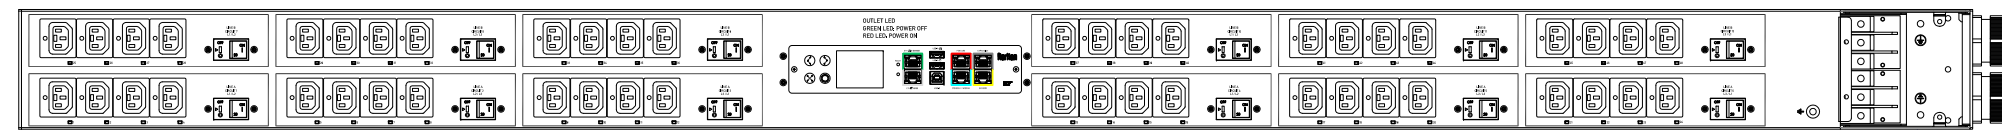

SEE TERMINAL WIRE CONNECTION

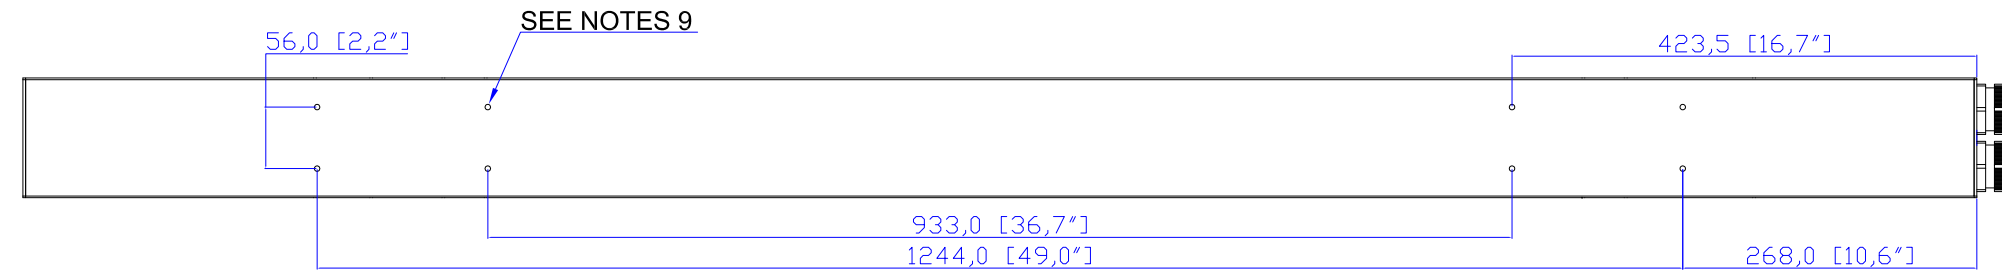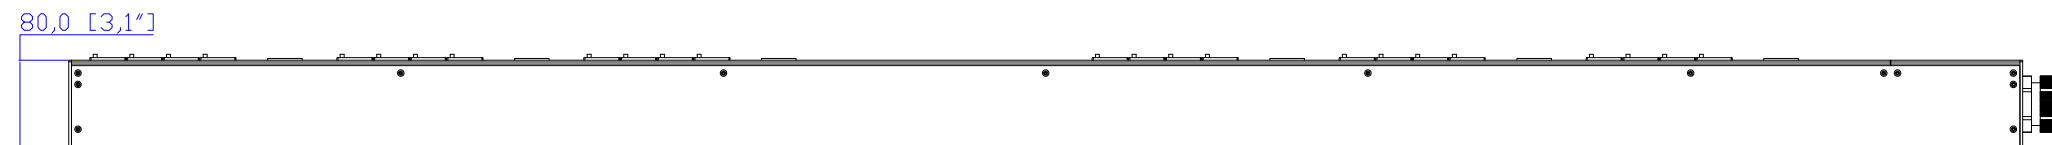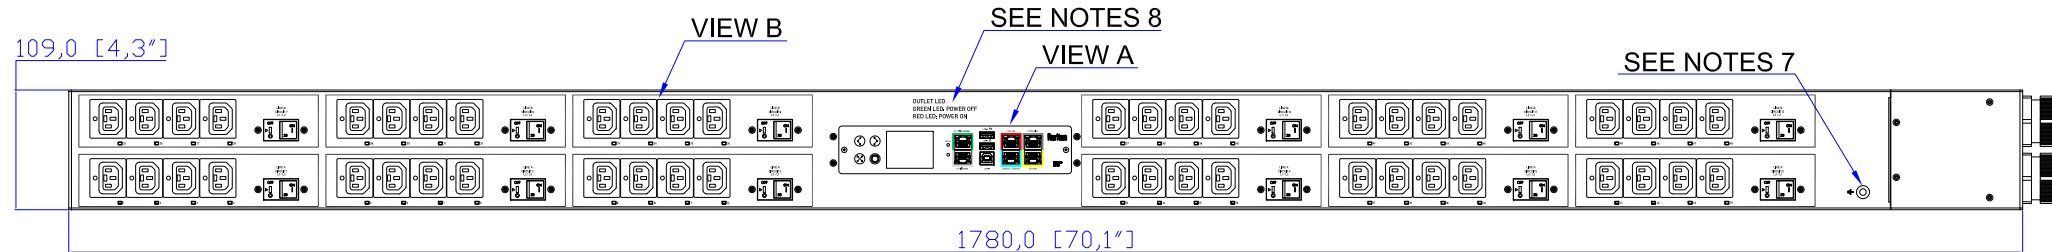

- NOTES:**
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS (INCHES).
 4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURE. BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
 5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
 6. DIMENSION TOLERANCE: LENGTH +/-3MM, WIDTH +/-1MM, DEPTH +/-0.5MM.
 7. D12-D15 ANTI-PAINT ZONE, SCREWED BY M6 SCREW, TORQUE 30Kgf-cm.
 8. OUTLET LED GREEN LED: POWER OFF RED LED: POWER ON
 9. MOUNTING BUTTON FIXED BY M5 x 10L FLAT SCREW, TORQUE 5Kgf-cm

<p>Raritan A brand of legrand</p>	PROJECTION THIRD ANGLE	DO NOT SCALE DRAWING	TITLE: iPDU Zero U Three Phase, 48A(2)/208-240V Plug Type: 48A Cord 3P (2) Outlet Type: Locking C13 (48)
		SHEET 1 OF 1	DWG NO: MPX3-5545X2XU-E2V2 M5 & MPX3-4545X2XU-E2V2 M5
Drawing Maker: EVA LIN Mar. 19, 2018	Design Engineer: Kenny_C Mar. 19, 2018	Approver: Tom_H Mar. 19, 2018	MODEL NO: PX3-5545X2XU-E2V2 & PX3-4545X2XU-E2V2 PX3-5545X2XU-E2V2M5 & PX3-4545X2XU-E2V2M5

REV.
2A