



1. KST RNBS 22-6 or equivalent terminals for 4 AWG Wire
2. Inside diameter 6.4 mm & Outside diameter 8.8mm ring for M6 screw

VIEW D

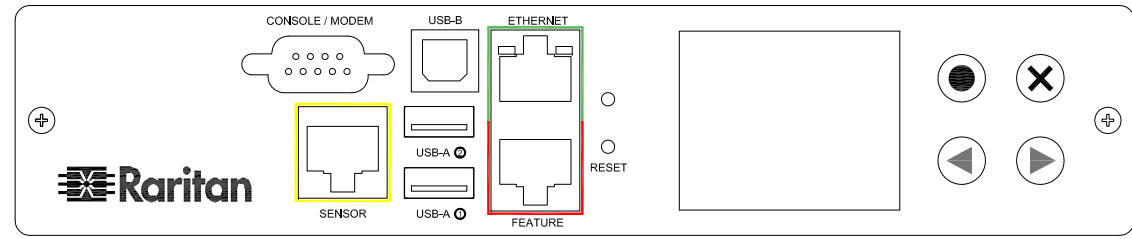


VIEW B


Option 1.

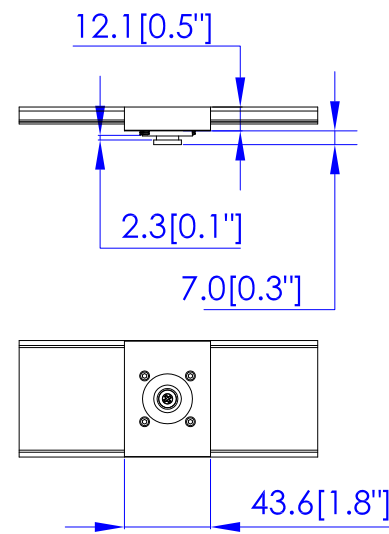


Option 2.

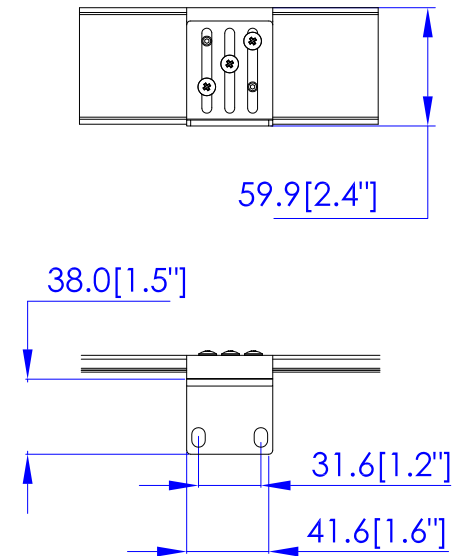

Option 3.

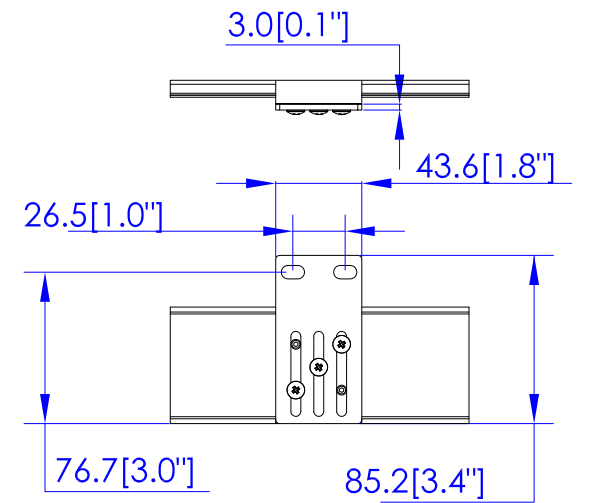


VIEW C

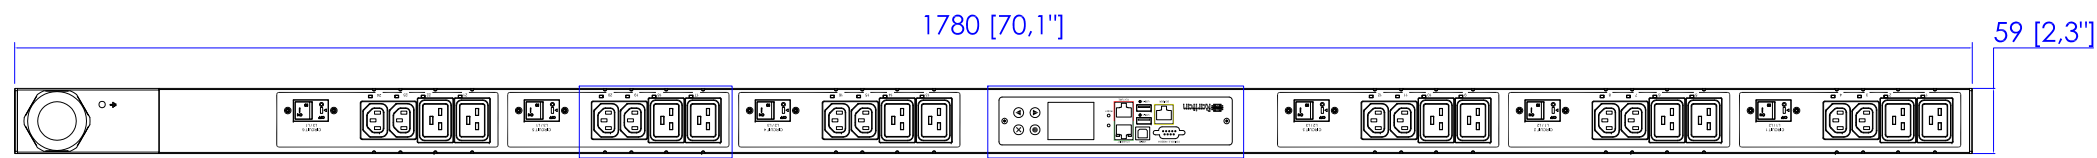

131.5 [5.2"]


See VIEW A

See VIEW B




15 [0.6"]

See VIEW D

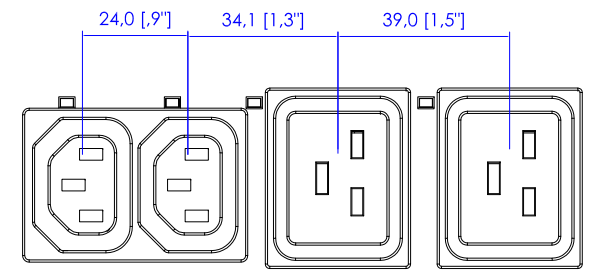

VIEW A

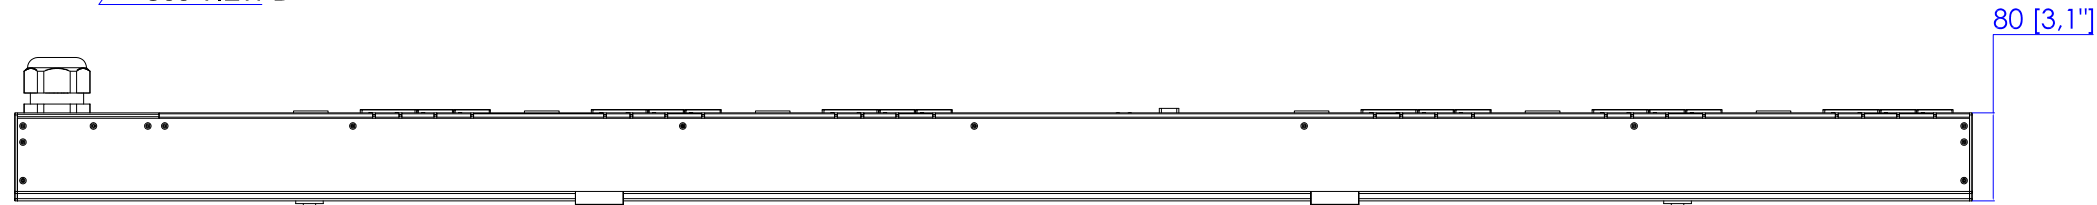

80 [3.1"]

See VIEW C



268 [10.6"]

933 [36.7"]

1244 [49.0"]

NOTES:

1. ALL DIMENSIONS ARE MILLIMETERS [INCHES].



Drawing Maker:	Tom Hsueh	Mar. 31. 2016
Design Engineer:	Siang Hung	Mar. 31. 2016
Approver:	Tom Hsueh	Mar. 31. 2016



PROJECTION
THIRD ANGLE

DO NOT SCALE DRAWING

SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, Inc. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, Inc. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE.

TITLE:
iPDU Zero U
Three Phase, 48A/208-240V
Plug Type: 48A Terminal 3P
Outlet Type: (12) IEC320 C13, (12) IEC320 C19

DWG NO. **MPX3-5551X & MPX3-4551X**

REV. **0A**