

48A, 34.5kVA

# Technical Specifications / Engineering Submittals Raritan Model Number: PX3-5747T-V2

rev20250625

## **LINE DRAWING**

000 - 000				neine mannera	
999H 💾 999H			9991	name Consider	. 🕒 .

#### **FEATURES**

Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor
ISO/IEC 62053-21 1% (see page 3 for details)
Yes
Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure
Gigabit (10/100/1000 BaseT) Ethernet port; secondary, redundant (10/100/1000 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)
HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC; Modbus over TCP
Yes, Max 32 PDUs can be daisy chained using a USB connection and 32 PDUs using Ethernet connection
Color, matrix LCD display: Voltage, current, or active power (per line, per breaker, or per receptacle / outlet); Alarms; Configuration information (name, ratings, IP / Networking information); Auto-flip orientation



rev20250625

## **INPUT**

Input Plug	IEC 60309 3P+N+E 7h 60A (4P5W), IP67	
Cord Length	3 meters (9.84 feet) standard	
Cord Entry	Top-front feed	
Cable Type	TBD	
Number of Power Cords	1	
Maximum Input Current	60A	
Nominal Input Voltage	415V 3 phase	
Rated Input Voltage	380 - 415V 3 phase	
Input Frequency	50/60Hz	
Power Capacity	31.6kVA at 380V, 34.5kVA at 415V	

## OUTPUT

Nominal Output Voltage	230V
Rated Output Voltage	220 - 240V
Receptacles (Output Connections)	(36) IEC320 C13, 12A (12) IEC320 C19, 16A
Securelock Support	Yes
Cord Retention	Yes
Overload Protection	(12) Airpax LELBX1-20, 5KAIC

## **PHYSICAL**

Color	Black powder coat (custom colors available)	
Unit Dimensions (WxDxH)	4.3" x 3.1" x 70.1" ; 109mm x 80mm x 1780mm	
Unit Weight	TBD	
Shipping Weight	TBD	
Shipping Dimensions (WxDxH)	11.42" x 6.57" x 75.2" ; 290mm x 167mm x 1910mm	
Mounting	Tool-less button mount	



rev20250625

## **ENVIRONMENTAL**

Operating Temperature	60°C
Operating Relative Humidity	85%
Operating Elevation	0-6000ft

## CONFORMANCE

Regulatory Approvals	UL Listed, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant
Warranty	Standard 2 years manufacturer warranty


#### **ACCURACY**

	Input Measurement	Output Measurement
LCD & GUI Current	±1% at 0.1 A resolution	±1% at 0.1 A resolution
Voltage	±1% at 0.1 V resolution	±1% at 0.1 V resolution
Active Power	±1% at 1 W resolution	±1% at 1 W resolution
Apparent Power	±1% at 1 VA resolution	±1% at 1 VA resolution
Power Factor	±1% at 0.1 resolution	±1% at 0.1 resolution
Active Energy	±1% at 0.1 kWh resolution	±1% at 0.1 kWh resolution
Branch Measurement		
Current	±1% at 0.1 A resolution	



rev20250625

## **CONTROL PANEL**

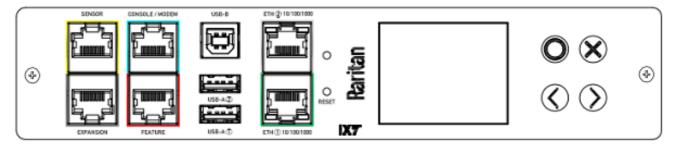




# **Technical Specifications / Engineering Submittals**

Raritan Model Number: PX3-5747T-V2

rev20250625

#### **ELECTRICAL (ONE LINE) DIAGRAM**

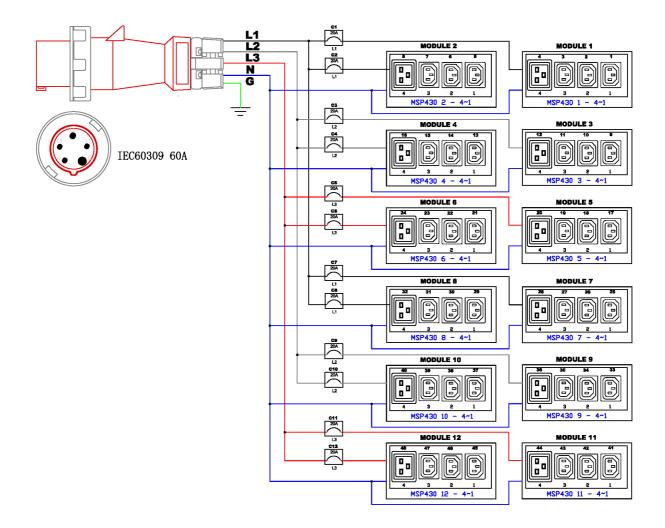




# **Technical Specifications / Engineering Submittals**

Raritan Model Number: PX3-5747T-V2

rev20250625


#### **MECHANICAL DIAGRAM**

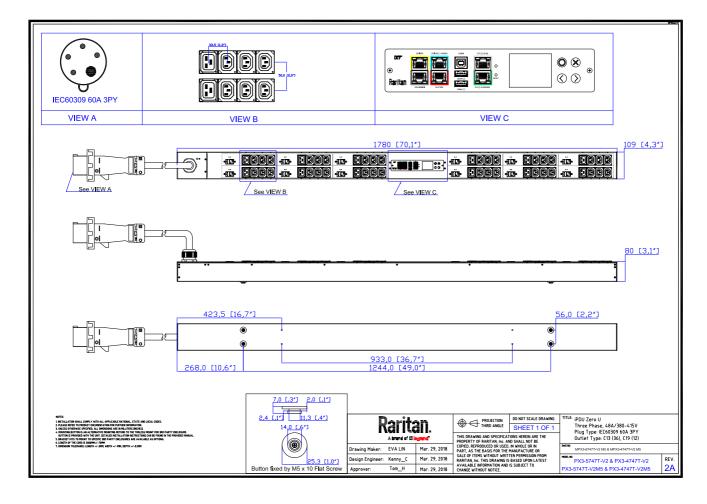



rev20250625

#### **TRIP CURVE**

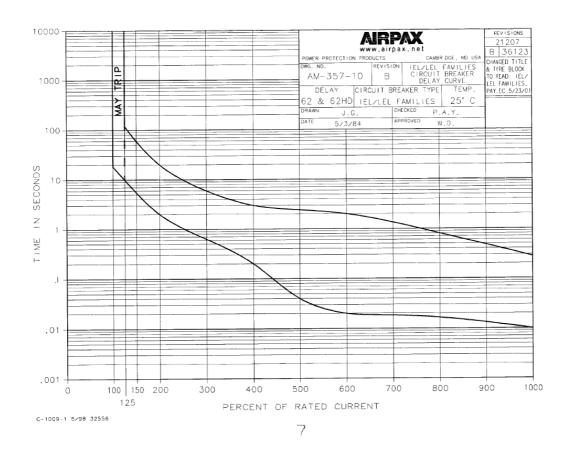

This file generated on: Wed, June 25, 2025 - 03:43:40