



IEC60309 32A PSE


VIEW A

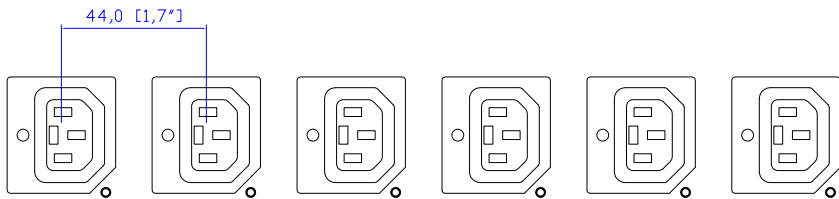


VIEW B

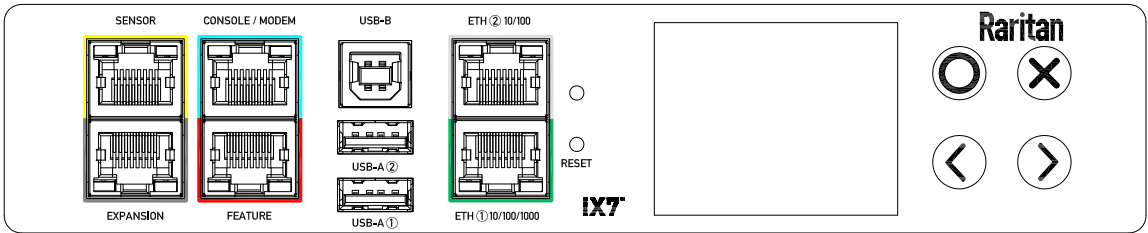

VIEW C

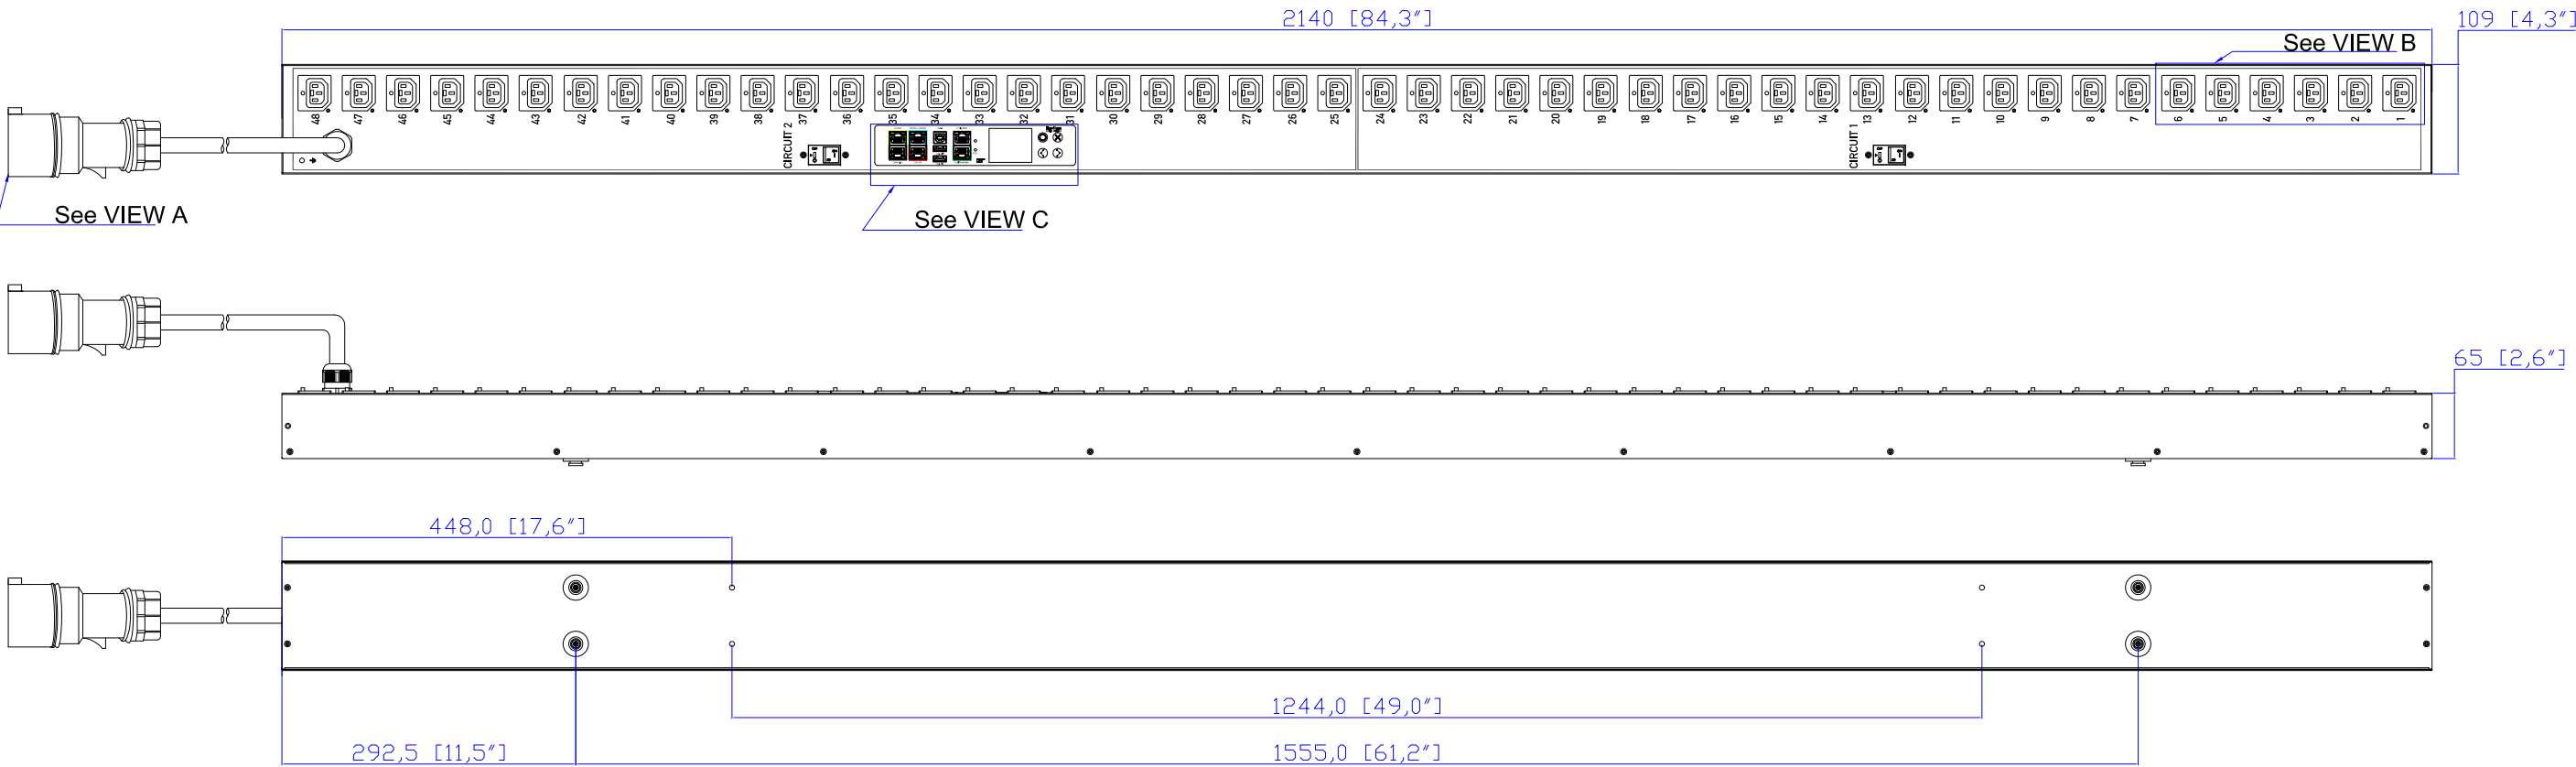


- NOTES:
1. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE AND LOCAL CODES.
 2. PLEASE REFER TO PRODUCT DOCUMENTATION FOR FURTHER INFORMATION.
 3. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MILLIMETERS [INCHES].
 4. MOUNTING BUTTON IS AN ALTERNATIVE MOUNTING METHOD TO THE TOOLLESS MOUNT FOR 3RD PARTY ENCLOSURE. BUTTON IS PROVIDED WITH THE UNIT. DETAILED INSTALLATION INSTRUCTIONS CAN BE FOUND IN THE PROVIDED MANUAL.
 5. BRACKET KITS TO MOUNT TO SPECIFIC 3RD PARTY ENCLOSURES ARE AVAILABLE AS OPTIONS.
 6. LENGTH OF THE CORD IS 3000MM +/- 70MM
 7. DIMENSION TOLERANCE: LENGTH +/- 3MM, WIDTH +/- 1MM, DEPTH +/- 0,5MM
 8. REFER TO THE TABLE FOR DETAIL CORD LENGTH DEFINITION

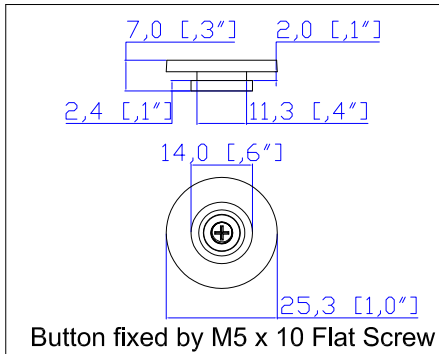

Button fixed by M5 x 10 Flat Screw

Raritan
A brand of **legrand**

Drawing Maker:	EVA LIN	Nov. 20, 2017
Design Engineer:	Siang_H	Nov. 20, 2017
Approver:	Tom_H	Nov. 20, 2017



PROJECTION
THIRD ANGLE

DO NOT SCALE DRAWING

SHEET 1 OF 1

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF RARITAN, INC. AND SHALL NOT BE COPIED, REPRODUCED OR USED, IN WHOLE OR IN PART, AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION FROM RARITAN, INC. THIS DRAWING IS BASED UPON LATEST AVAILABLE INFORMATION AND IS SUBJECT TO CHANGE WITHOUT NOTICE..

TITLE: iPDU Zero U
Single Phase, 32A/200V
Plug Type: IEC60309 32A PSE
Outlet Type: Locking C13 (48)

DWG NO: MPX3-5821JT-E2N1Q2 M5 & MPX3-4821JT-E2N1Q2 M5

MODEL NO: PX3-5821JT-E2N1Q2 & PX3-4821JT-E2N1Q2
PX3-5821JT-E2N1Q2M5 & PX3-4821JT-E2N1Q2M5

REV.
2A