


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### LINE DRAWING

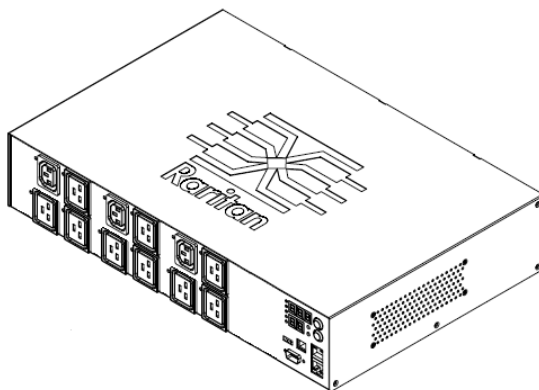

### FEATURES

|                                     |                                                                                                                            |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------|
| Energy Metering                     | Voltage (V), Current (A), Active Power (kW), Real Power (kVA), Energy (kWh), Power Factor                                  |
| Metering Accuracy                   | ISO/IEC 62053-21 1%                                                                                                        |
| Metering per Input Line             | Yes                                                                                                                        |
| Metering per Branch Circuit Breaker | Yes                                                                                                                        |
| Metering per Output Receptacle      | Yes                                                                                                                        |
| Remote Outlet Switching             | No                                                                                                                         |
| Environmental Sensor Ready          | Yes                                                                                                                        |
| Replaceable Controller              | No                                                                                                                         |
| Compatible Sensors                  | Temperature, Humidity, Air Flow, Differential Pressure, Water Leak, and Contact Closure                                    |
| Networking                          | (10/100 BaseT) Ethernet port. Optional WiFi (802.11a/b/g/n)                                                                |
| Remote Management                   | HTTP(s); SSH; Telnet; RS-232 (Serial); Power IQ; SNMP version v2/v3; SMTP; JSON-RPC                                        |
| Cascading                           | Yes, Max 8 PDUs can be daisy chained using USB connection                                                                  |
| Onboard Display                     | 3-digit LED user-selectable display : Voltage, current, or active power (per line, per breaker or per receptacle / outlet) |
| Embedded Processor                  | ARM9 400MHZ (Atmel SAM9G20), 16MB NOR Flash, 64MB SDRAM                                                                    |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### INPUT

|                       |                                |
|-----------------------|--------------------------------|
| Input Plug            | NEMA L21-30P (4P5W)            |
| Cord Length           | 3 meters (9.84 feet) standard  |
| Cord Entry            | Rear feed                      |
| Cable Type            | IP44("splashproof")            |
| Number of Power Cords | 1                              |
| Maximum Input Current | 30A                            |
| Nominal Input Voltage | 208V 3 phase                   |
| Rated Input Voltage   | 190 - 208V 3 phase             |
| Input Frequency       | 50/60Hz                        |
| Power Capacity        | 7.9kVA at 190V, 8.6kVA at 208V |

### OUTPUT

|                                  |                                            |
|----------------------------------|--------------------------------------------|
| Nominal Output Voltage           | 208V                                       |
| Rated Output Voltage             | 190 - 208V                                 |
| Receptacles (Output Connections) | (3) IEC320 C13, 12A<br>(9) IEC320 C19, 16A |
| Securelock Support               | Yes                                        |
| Cord Retention                   | No                                         |
| Overload Protection              | (3) LEGBX66-20                             |

### PHYSICAL

|                             |                                                  |
|-----------------------------|--------------------------------------------------|
| Color                       | Black powder coat (custom colors available)      |
| Unit Dimensions (WxDxH)     | 17.3" x 11.5" x 3.5" ; 440mm x 293mm x 88mm      |
| Unit Weight                 | 6.35 kg                                          |
| Shipping Weight             | 7.05 kg                                          |
| Shipping Dimensions (WxDxH) | 22.05" x 21.73" x 11.18" ; 560mm x 552mm x 284mm |
| Mounting                    | RACK-KIT-PX-2U                                   |

## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### ENVIRONMENTAL

|                             |          |
|-----------------------------|----------|
| Operating Temperature       | 60°C     |
| Operating Relative Humidity | 85%      |
| Operating Elevation         | 0-6000ft |

### CONFORMANCE

|                      |                                                                              |
|----------------------|------------------------------------------------------------------------------|
| Regulatory Approvals | UL Listed, Canada ICES-003, Part 15 Class A of the FCC rules, RoHS compliant |
| Warranty             | Standard 2 years manufacturer warranty                                       |


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### CONTROL PANEL

Dimension: 82mm x 72.85mm

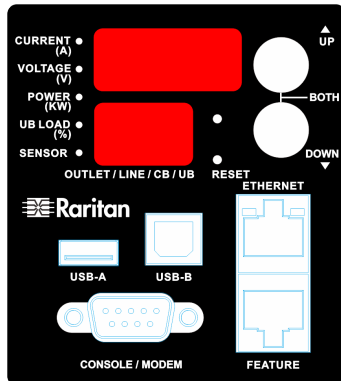


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### ELECTRICAL (ONE LINE) DIAGRAM

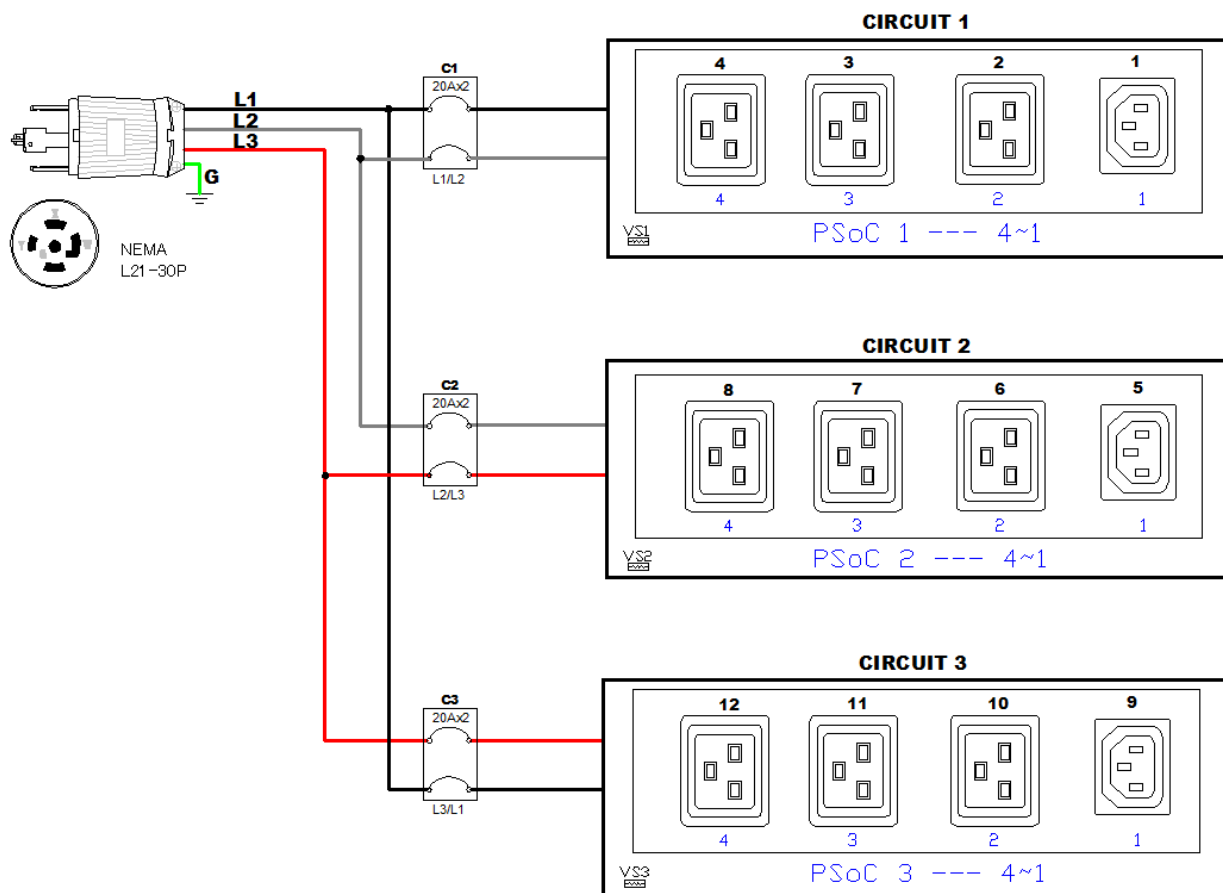


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### MECHANICAL DIAGRAM

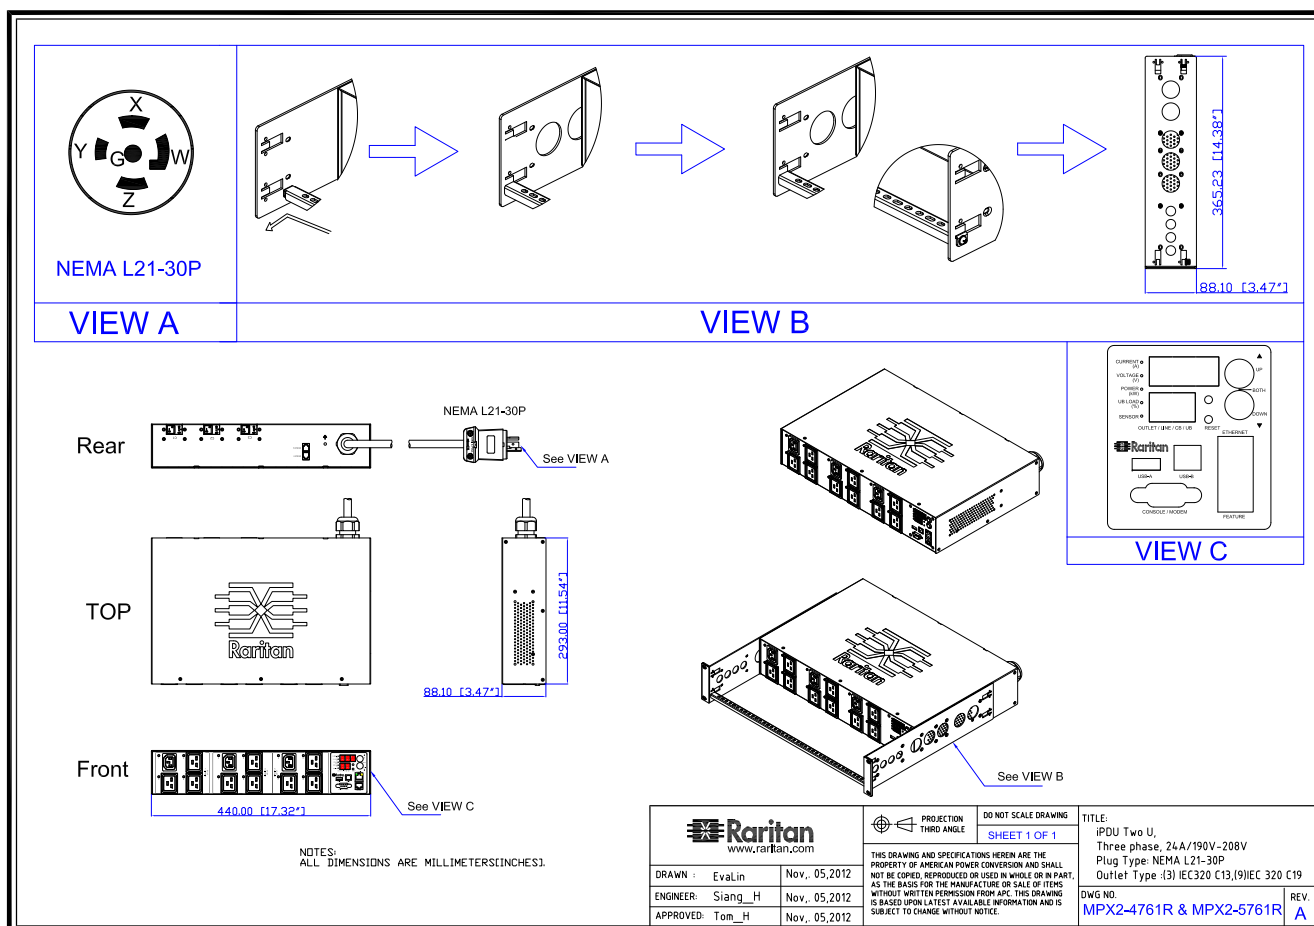


## Technical Specifications / Engineering Submittals

Raritan Model Number: PX2-4761R

rev20191212

### TRIP CURVE

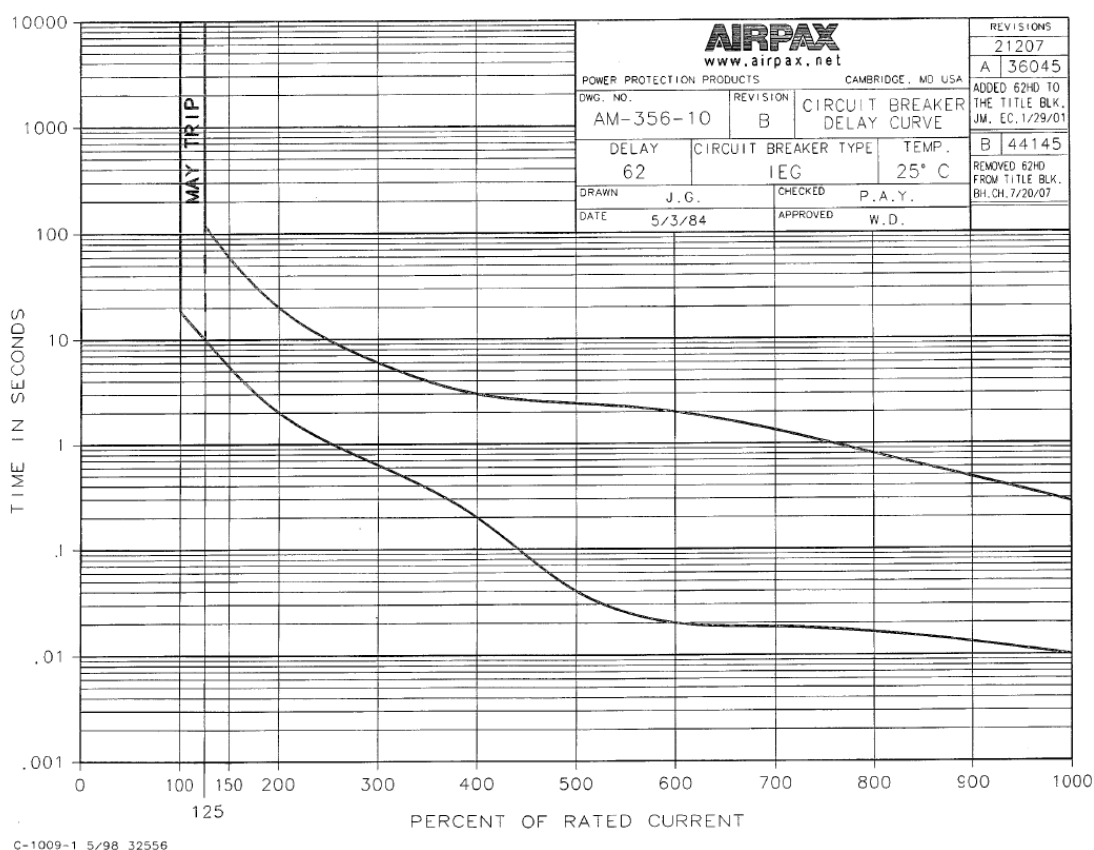

This file generated on: Thu, December 12, 2019 - 07:14:54